

## Sampling-based robust control of autonomous systems with non-Gaussian noise

Badings, Thom S.; Abate, Alessandro; Jansen, Nils; Parker, David; Poonawala, Hasan A.; Stoelinga, Marielle

DOI:  
[10.1609/aaai.v36i9.21201](https://doi.org/10.1609/aaai.v36i9.21201)

License:  
None: All rights reserved

Document Version  
Peer reviewed version

*Citation for published version (Harvard):*  
Badings, TS, Abate, A, Jansen, N, Parker, D, Poonawala, HA & Stoelinga, M 2022, Sampling-based robust control of autonomous systems with non-Gaussian noise. in *Proceedings of the Thirty-Sixth AAAI Conference on Artificial Intelligence*. Proceedings of the AAAI Conference on Artificial Intelligence, no. 9, vol. 36, AAAI Press, Palo Alto, California, pp. 9669-9678, 36th AAAI Conference on Artificial Intelligence, Vancouver, British Columbia, Canada, 22/02/22. <https://doi.org/10.1609/aaai.v36i9.21201>

[Link to publication on Research at Birmingham portal](#)

### General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

### Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

# Sampling-Based Robust Control of Autonomous Systems with Non-Gaussian Noise \*

Thom S. Badings<sup>1</sup>, Alessandro Abate<sup>2</sup>, Nils Jansen<sup>1</sup>  
David Parker<sup>3</sup>, Hasan A. Poonawala<sup>4</sup>, Marielle Stoelinga<sup>1</sup>

<sup>1</sup> Radboud University, Nijmegen, the Netherlands

<sup>2</sup> University of Oxford, Oxford, United Kingdom

<sup>3</sup> University of Birmingham, Birmingham, United Kingdom

<sup>4</sup> University of Kentucky, Kentucky, USA

## Abstract

Controllers for autonomous systems that operate in safety-critical settings must account for stochastic disturbances. Such disturbances are often modeled as process noise, and common assumptions are that the underlying distributions are known and/or Gaussian. In practice, however, these assumptions may be unrealistic and can lead to poor approximations of the true noise distribution. We present a novel planning method that does not rely on any explicit representation of the noise distributions. In particular, we address the problem of computing a controller that provides probabilistic guarantees on safely reaching a target. First, we abstract the continuous system into a discrete-state model that captures noise by probabilistic transitions between states. As a key contribution, we adapt tools from the scenario approach to compute probably approximately correct (PAC) bounds on these transition probabilities, based on a finite number of samples of the noise. We capture these bounds in the transition probability intervals of a so-called interval Markov decision process (iMDP). This iMDP is robust against uncertainty in the transition probabilities, and the tightness of the probability intervals can be controlled through the number of samples. We use state-of-the-art verification techniques to provide guarantees on the iMDP, and compute a controller for which these guarantees carry over to the autonomous system. Realistic benchmarks show the practical applicability of our method, even when the iMDP has millions of states or transitions.

## 1 Introduction

Consider a so-called *reach-avoid problem* for an unmanned aerial vehicle (UAV), where the goal is to reach a desirable region within a given time horizon, while avoiding certain unsafe regions (Baier and Katoen 2008; Clarke, Emerson, and Sistla 1986). A natural formal model for such an autonomous system is a *dynamical system*. The *state* of the system reflects the position and velocity of the UAV, and the *control inputs* reflect choices that may change the state over time (Kulakowski, Gardner, and Shearer 2007). The dynamical system is *linear* if the state transition is linear in the current state and control input. Our problem is to compute a *controller*, such

that the state of the UAV progresses safely, without entering unsafe regions, to its goal (Åström and Murray 2010).

However, factors like turbulence and wind gusts cause *uncertainty* in the outcome of control inputs (Blackmore et al. 2010). We model such uncertainty as *process noise*, which is an additive random variable (with possibly infinitely many outcomes) in the dynamical system that affects the transition of the state. Controllers for autonomous systems that operate in safety-critical settings must account for such uncertainty.

A common assumption to achieve computational tractability of the problem is that the process noise follows a Gaussian distribution (Park, Serpedin, and Qaraqe 2013), for example in linear-quadratic-Gaussian control (Anderson and Moore 2007). However, in realistic problems, such as the UAV operating under turbulence, this assumption yields a poor approximation of the uncertainty (Blackmore et al. 2010). Distributions may even be *unknown*, meaning that one cannot derive a set-bounded or stochastic representation of the noise. In this case, it is generally hard or even impossible to derive *hard guarantees* on the probability that a given controller ensures a safe progression of the system’s state to the objective.

In this work, we do not require that the process noise is known. Specifically, we provide *probably approximately correct* (PAC) guarantees on the performance of a controller for the reach-avoid problem, where the distribution of the noise is unknown. As such, we solve the following problem:

Given a linear dynamical system perturbed by additive noise of unknown distribution, compute a controller under which, with high confidence, the probability to satisfy a reach-avoid problem is above a given threshold value.

**Finite-state abstraction.** The fundamental concept of our approach is to compute a finite-state abstraction of the dynamical system. We obtain such an abstract model from a *partition* of the continuous state space into a set of disjoint convex *regions*. Actions in this abstraction correspond to control inputs that induce transitions between these regions. Due to the process noise, the outcome of an action is stochastic, and every transition has a certain probability.

**Probability intervals.** Since the distribution of the noise is unknown, it is not possible to compute the transition probabilities exactly. Instead, we estimate the probabilities based

\*This work was funded by NWO grant NWA.1160.18.238 (Pri-maVera), and ERC Advanced Grant 834115 (FUN2MODEL). Copyright © 2022, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.

on a finite number of *samples* (also called scenarios) of the noise, which may be obtained from a high fidelity (blackbox) simulator or from experiments. To be *robust* against estimation errors in these probabilities, we adapt tools from the *scenario approach* (also called scenario optimization), which is a methodology to deal with stochastic convex optimization in a data-driven fashion (Campi and Garatti 2008; Garatti and Campi 2019). We compute *upper and lower bounds* on the transition probabilities with a desired *confidence level*, which we choose up front. These bounds are *PAC*, as they contain the true probabilities with at least this confidence level.

**Interval MDPs.** We formalize our abstractions with the PAC probability bounds using so-called interval Markov decision processes (iMDPs). While regular MDPs require precise transition probabilities, iMDPs exhibit probability intervals (Givan, Leach, and Dean 2000). Policies for iMDPs have to robustly account for all possible probabilities within the intervals, and one usually provides upper and lower bounds on maximal or minimal reachability probabilities or expected rewards (Hahn et al. 2017; Puggelli et al. 2013; Wolff, Topcu, and Murray 2012). For MDPs with precise probabilities, mature tool support exists, for instance, via PRISM (Kwiatkowska, Norman, and Parker 2011). In this work, we extend the support of PRISM to iMDPs.

**Iterative abstraction scheme.** The tightness of the probability intervals depends on the number of noise samples. Hence, we propose an *iterative abstraction scheme*, to iteratively improve these intervals by using increasing sample sizes. For the resulting iMDP, we compute a robust policy that maximizes the probability to safely reach the goal states. Based on a pre-defined threshold, we decide whether this probability is unsatisfactory or satisfactory. In the former case, we collect additional samples to reduce the uncertainty in the probability intervals. If the probability is satisfactory, we use the policy to compute a controller for the dynamical system. The specified confidence level reflects the likelihood that the optimal reachability probability on the iMDP is a *lower bound* for the probability that the dynamical system satisfies the reach-avoid problem under this derived controller.

**Contributions.** Our contributions are threefold: (1) We propose a novel method to compute safe controllers for dynamical systems with unknown noise distributions. Specifically, the probability of safely reaching a target is guaranteed, with high confidence, to exceed a pre-defined threshold. (2) We propose a scalable refinement scheme that incrementally improves the iMDP abstraction by iteratively increasing the number of samples. (3) We apply our method to multiple realistic control problems, and benchmark against two other tools: StocHy and SReachTools. We demonstrate that the guarantees obtained for the iMDP abstraction carry over to the dynamical system of interest. Moreover, we show that using probability intervals instead of point estimates of probabilities yields significantly more robust results.

## Related work

**Reachability analysis.** Verification and controller synthesis for reachability in stochastic systems is an active field of

research in safety-critical engineering (Abate et al. 2008; Lavaei et al. 2021). Most approaches are based on formal abstractions (Alur et al. 2000; Lahijanian, Andersson, and Belta 2015; Soudjani and Abate 2013) or work in the continuous domain directly, e.g., using Hamilton-Jacobi reachability analysis (Bansal et al. 2017; Herbert et al. 2017) or optimization (Rosolia, Singletary, and Ames 2020). Several tools exist, such as StocHy (Cauchi and Abate 2019), ProbReach (Shmarov and Zuliani 2015) and SReachTools (Vinod, Gleason, and Oishi 2019). However, the majority of these methods require full knowledge of the models.

We break away from this literature in putting forward abstractions that *do not require any knowledge of the noise distribution*, via the *scenario approach*. It has been used for the verification of Markov decision processes (MDPs) with uncertain parameters (Cubuktepe et al. 2020), albeit only for finite-state systems. SReachTools also exhibits a sampling-based method, but relies on Hoeffding’s inequality to obtain confidence guarantees (Sartipizadeh et al. 2019), so the noise is still assumed to be sub-Gaussian (Boucheron, Lugosi, and Massart 2013). By contrast, the scenario approach is *completely distribution-free* (Campi and Garatti 2018). Moreover, SReachTools is limited to problems with convex safe sets (a restrictive assumption in many problems) and its sampling-based methods can only synthesize open-loop controllers. Further related are sampling-based feedback motion planning algorithms, such as LQR-Trees. However, sampling in LQR-Trees relates to random exploration of the state space, and not to stochastic noise affecting the dynamics as in our setting (Reist, Preiswerk, and Tedrake 2016; Tedrake 2009).

**Alternatives to the scenario approach.** Monte Carlo methods (e.g. particle methods) can also solve stochastic reach-avoid problems (Blackmore et al. 2010; Lesser, Oishi, and Erwin 2013). These methods simulate the system via many samples of the uncertain variable (Smith 2013). Monte Carlo methods *approximate* stochastic problems, while our approach provides *bounds* with a desired *confidence level*.

In distributionally robust optimization (DRO), decisions are robust with respect to *ambiguity sets* of distributions (Esfahani and Kuhn 2018; Goh and Sim 2010; Wiesemann, Kuhn, and Sim 2014). While the scenario approach uses samples of the uncertain variable, DRO works on the domain of uncertainty directly, thus involving potentially complex ambiguity sets (Garatti and Campi 2019). Designing robust policies for iMDPs with known uncertainty sets was studied by Puggelli et al. (2013), and Wolff, Topcu, and Murray (2012). Hybrid methods between the scenario approach and robust optimization also exist (Margellos, Goulart, and Lygeros 2014).

**PAC literature.** The term PAC refers to obtaining, with high probability, a hypothesis that is a good approximation of some unknown phenomenon (Haussler 1990). PAC learning methods for discrete-state MDPs are developed in Brafman and Tennenholtz (2002), Fu and Topcu (2014), and Kearns and Singh (2002), and PAC statistical model checking for MDPs in Ashok, Kretínský, and Weininger (2019).

**Safe learning methods.** We only briefly discuss the emerging field of safe learning (Brunke et al. 2021; García and

Fernández 2015). Recent works use Gaussian processes for learning-based model predictive control (Hewing, Kabzan, and Zeilinger 2020; Koller et al. 2018) or reinforcement learning with safe exploration (Berkenkamp et al. 2017), and control barrier functions to reduce model uncertainty (Taylor et al. 2020). Safe learning control concerns learning unknown, *deterministic* system dynamics, while imposing strong assumptions on stochasticity (Fisac et al. 2019). By contrast, our problem setting is fundamentally different: we reason about *stochastic* noise of a completely unknown distribution.

## 2 Foundations and Outline

A *discrete probability distribution* over a finite set  $X$  is a function  $\text{prob}: X \rightarrow [0, 1]$  with  $\sum_{x \in X} \text{prob}(x) = 1$ . The set of all distributions over  $X$  is  $\text{Dist}(X)$ , and the cardinality of a set  $X$  is  $|X|$ . A *probability density function* over a random variable  $x$  conditioned on  $y$  is written as  $p(x|y)$ . All vectors  $\mathbf{x} \in \mathbb{R}^n$ ,  $n \in \mathbb{N}$ , are column vectors and denoted by bold letters. We use the term *controller* when referring to dynamical systems, while we use *policy* for (i)MDPs.

### 2.1 Linear dynamical systems

We consider discrete-time, continuous-state systems, where the progression of the  $n$ -dimensional state  $\mathbf{x} \in \mathbb{R}^n$  depends *linearly* on the current state, a control input, and a process noise term. Given a state  $\mathbf{x}_k$  at discrete time step  $k \in \mathbb{N}$ , the successor state at time  $k + 1$  is computed as

$$\mathbf{x}_{k+1} = A\mathbf{x}_k + B\mathbf{u}_k + \mathbf{q}_k + \mathbf{w}_k, \quad (1)$$

where  $\mathbf{u}_k \in \mathcal{U} \subset \mathbb{R}^p$  is the control input at time  $k$ ,  $A \in \mathbb{R}^{n \times n}$  and  $B \in \mathbb{R}^{n \times p}$  are appropriate matrices,  $\mathbf{q}_k \in \mathbb{R}^n$  is a deterministic disturbance, and  $\mathbf{w}_k \in \mathbb{R}^n$  is an arbitrary additive process noise term. We consider *piecewise-linear feedback controllers* of the form  $\phi: \mathbb{R}^n \times \mathbb{N} \rightarrow \mathcal{U}$ , which map a state  $\mathbf{x}_k \in \mathbb{R}^n$  and a time step  $k \in \mathbb{N}$  to a control input  $\mathbf{u}_k \in \mathcal{U}$ . The controller may be time-dependent, because we consider control objectives with a finite time horizon.

The random variable  $\mathbf{w}_k \in \Delta$  is defined on a probability space  $(\Delta, \mathcal{D}, \mathbb{P})$ , with  $\sigma$ -algebra  $\mathcal{D}$  and probability measure  $\mathbb{P}$  defined over  $\mathcal{D}$ . We do not require the sample space  $\Delta$  and probability measure  $\mathbb{P}$  to be known explicitly. Instead, we employ a sampling-based approach, for which it suffices to have a finite number of  $N$  independent and identically distributed (i.i.d.) samples of the random variable, and to assume that its distribution is independent of time. Due to the process noise  $\mathbf{w}_k$ , the successor state  $\mathbf{x}_{k+1}$  is a random variable at time  $k$ . We denote the probability density function over successor states as  $p_{\mathbf{w}_k}(\mathbf{x}_{k+1} | \hat{\mathbf{x}}_{k+1})$ , where  $\hat{\mathbf{x}}_{k+1} = A\mathbf{x}_k + B\mathbf{u}_k + \mathbf{q}_k$  is its *noiseless value*.

**Remark 1** (Restriction to linear systems). *Our methods are theoretically amenable to nonlinear systems, albeit requiring more advanced 1-step reachability computations unrelated to our main contributions. Hence, we restrict ourselves to the linear system in Eq. (1). We discuss extensions to nonlinear systems in Sect. 6.*

**Problem statement.** We consider control objectives that are expressed as (*step-bounded*) *reach-avoid properties*. A

reach-avoid property  $\varphi_{\mathbf{x}_0}^K$  is satisfied if, starting from state  $\mathbf{x}_0$  at time  $k = 0$ , the system reaches a desired *goal region*  $\mathcal{X}_G \subset \mathbb{R}^n$  within a finite time horizon of  $K \in \mathbb{N}$  steps, while avoiding a *critical region*  $\mathcal{X}_C \subset \mathbb{R}^n$ . We write the probability of satisfying a reach-avoid property  $\varphi_{\mathbf{x}_0}^K$  under a controller  $\phi$  as  $\text{Pr}^\phi(\varphi_{\mathbf{x}_0}^K)$ . We state the formal problem as follows.

Compute a controller  $\phi$  for the system in Eq. (1) that, with high confidence, guarantees that  $\text{Pr}^\phi(\varphi_{\mathbf{x}_0}^K) \geq \eta$ , where  $\eta \in [0, 1]$  is a pre-defined probability threshold.

### 2.2 Markov decision processes

A *Markov decision process* (MDP) is a tuple  $\mathcal{M} = (S, \text{Act}, s_I, P)$  where  $S$  is a finite set of states,  $\text{Act}$  is a finite set of actions,  $s_I$  is the initial state, and  $P: S \times \text{Act} \rightarrow \text{Dist}(S)$  is the (partial) probabilistic transition function. We call  $(s, a, s')$  with probability  $P(s, a)(s') > 0$  a *transition*. A deterministic (or pure) policy (Baier and Katoen 2008) for an MDP  $\mathcal{M}$  is a function  $\pi: S^* \rightarrow \text{Act}$ , where  $S^*$  is a sequence of states. The set of all possible policies for  $\mathcal{M}$  is denoted by  $\Pi_{\mathcal{M}}$ . Note that we leave out rewards for brevity, but our approach is directly amenable to expected reward properties (Baier and Katoen 2008).

A *probabilistic reach-avoid property*  $\text{Pr}^\pi(\varphi_{s_I}^K)$  for an MDP describes the probability of reaching a set of goal states  $S_G \subset S$  within  $K \in \mathbb{N}$  steps under policy  $\pi \in \Pi$ , while avoiding a set of critical states  $S_C \subset S$ , where  $S_G \cap S_C = \emptyset$ . An optimal policy  $\pi^* \in \Pi_{\mathcal{M}}$  for MDP  $\mathcal{M}$  maximizes the *reachability probability*:

$$\pi^* = \arg \max_{\pi \in \Pi_{\mathcal{M}}} \text{Pr}^\pi(\varphi_{s_I}^K). \quad (2)$$

We now relax the assumption that probabilities are precisely given. An *interval Markov decision process* (iMDP) is a tuple  $\mathcal{M}_{\mathbb{I}} = (S, \text{Act}, s_I, \mathcal{P})$  where the uncertain (partial) probabilistic transition function  $\mathcal{P}: S \times \text{Act} \times S \rightarrow \mathbb{I}$  is defined over intervals  $\mathbb{I} = \{[a, b] \mid a, b \in (0, 1] \text{ and } a \leq b\}$ . iMDPs define sets of MDPs that vary only in their transition function. In particular, for an MDP transition function  $P$ , we write  $P \in \mathcal{P}$  if for all  $s, s' \in S$  and  $a \in \text{Act}$  we have  $P(s, a)(s') \in \mathcal{P}(s, a)(s')$  and  $P(s, a) \in \text{Dist}(S)$ . For iMDPs, a policy needs to be *robust* against all  $P \in \mathcal{P}$ . We employ value iteration to compute a policy  $\pi^* \in \Pi_{\mathcal{M}_{\mathbb{I}}}$  for iMDP  $\mathcal{M}_{\mathbb{I}}$  that maximizes the lower bound on the reachability probability  $\underline{\text{Pr}}^\pi(\varphi_{s_I}^K)$  within horizon  $K$ :

$$\pi^* = \arg \max_{\pi \in \Pi_{\mathcal{M}_{\mathbb{I}}}} \underline{\text{Pr}}^\pi(\varphi_{s_I}^K) = \arg \max_{\pi \in \Pi_{\mathcal{M}_{\mathbb{I}}}} \min_{P \in \mathcal{P}} \text{Pr}^\pi(\varphi_{s_I}^K). \quad (3)$$

Note that deterministic policies suffice to obtain optimal values for (i)MDPs (Puterman 1994; Puggelli et al. 2013).

### 2.3 Our iterative abstraction scheme

Our proposed approach is shown in Fig. 1. We choose a fixed state-space partition and confidence level up front, and select an initial number of samples  $N$  (note that extensions to variable confidence levels or partitions are straightforward). As explained in Sect. 3 and 4, we then abstract the dynamical system as an iMDP using  $N$  samples of the noise. For the

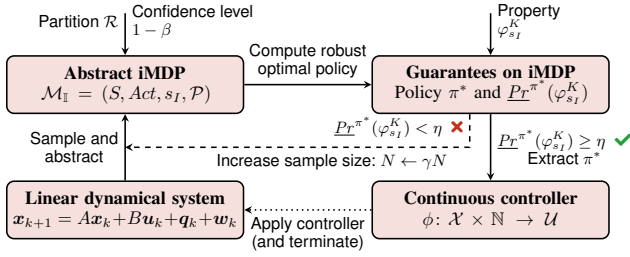


Figure 1: Our iterative approach between abstraction and verification, where  $N$  is the number of samples used for the abstraction, and  $\eta$  is the threshold reachability probability.

iMDP, we compute an optimal policy  $\pi^*$  that maximizes the probability of satisfying the given property, as per Eq. (3). If the maximum reachability probability under this policy is above the required threshold  $\eta$ , we compute the corresponding controller  $\phi$  for the dynamical system, and terminate the scheme. If the maximum probability is unsatisfactory (i.e. below  $\eta$ ), we obtain additional samples by increasing  $N$  by a fixed factor  $\gamma > 1$ . The updated iMDP has tighter probability intervals, but may also have more transitions. Since the states and actions of the iMDP are independent of  $N$ , they are only computed once, in the first iteration. In general we cannot guarantee *a priori* that the property is satisfiable up to the given value of  $\eta$ , so we also terminate the scheme after a fixed number of iterations, in which case no output is returned.

### 3 Finite-State MDP Abstraction

First, we describe how we partition the state space into a set of discrete convex regions. We then use this partition to build a finite-state abstraction of the dynamical system in Eq. (1).

#### 3.1 State space discretization

We choose a *partition*  $\mathcal{R}$  of the continuous state space  $\mathbb{R}^n$  into a set of disjoint *regions* that represent a bounded portion  $\mathcal{X} \subset \mathbb{R}^n$ . In addition, we define a single *absorbing region*  $r_a$ , representing  $\mathbb{R}^n \setminus \mathcal{X}$ . We number the regions in  $\mathcal{R}$  from 1 to  $|\mathcal{R}|$ , and define a function  $T: \mathbb{R}^n \rightarrow \{1, 2, \dots, |\mathcal{R}|, |\mathcal{R}| + 1\}$  that maps a continuous state  $x \in \mathbb{R}^n$  to one of the regions in partition  $\mathcal{R}$  through the index of that region, or to  $|\mathcal{R}| + 1$  if  $x \in r_a = \mathbb{R}^n \setminus \mathcal{X}$ . Thus, the absorbing region  $r_a$  captures the event that the continuous state leaves the bounded portion of the state space over which we plan. For convenience, we also define the inverse mapping as  $R_i = T^{-1}(i)$ .

We consider the regions in  $\mathcal{R}$  to be  $n$ -dimensional bounded, convex polytopes. In particular, convex polytope  $R_i$  is the solution set of  $m$  linear inequalities parameterized by  $M_i \in \mathbb{R}^{m \times n}$  and  $b_i \in \mathbb{R}^m$ , yielding  $R_i = \{x \in \mathbb{R}^n \mid M_i x \leq b_i\}$ . In addition, the following assumption allows us to translate properties for the dynamical system to properties on the iMDP abstraction:

**Assumption 1.** *The continuous goal region  $\mathcal{X}_G$  and critical region  $\mathcal{X}_C$  are aligned with the union of a subset of regions in  $\mathcal{R}$ , i.e.  $\mathcal{X}_G = \cup_{i \in I} R_i$  and  $\mathcal{X}_C = \cup_{j \in J} R_j$  for index sets  $I, J \subset \{1, 2, \dots, |\mathcal{R}|\}$ .*

#### 3.2 MDP abstraction

We formalize the dynamical system discretized under partition  $\mathcal{R}$  as an MDP  $\mathcal{M} = (S, Act, s_I, \mathcal{P})$ , by defining its states, actions, and transition probabilities (cf. ensuing paragraphs). We assume the initial state  $s_I \in S$  is known, and we capture time constraints by the bounded reach-avoid property.

**States.** The set of states is  $S = \{s_i \mid i = 1, \dots, |\mathcal{R}|\} \cup \{s_a\}$ , where discrete state  $s_i$  represents all continuous states  $x_k$  for which  $T(x_k) = i$ . Then, the MDP consists of  $|S| = |\mathcal{R}| + 1$  states: one for every region in partition  $\mathcal{R}$ , plus one state  $s_a$  corresponding to the absorbing region  $r_a$ . State  $s_a$  is a deadlock, meaning the only transition leads back to  $s_a$ .

**Actions.** Discrete actions correspond to the execution of a control input  $u_k \in \mathcal{U}$  in the dynamical system in Eq. (1). We define  $q \in \mathbb{N}$  MDP actions, so  $Act = \{a_1, \dots, a_q\}$ . Recall that the noiseless successor state of  $x_k$  is  $\hat{x}_{k+1} = Ax_k + Bu_k + q_k$ . Every action  $a_j$  is associated with a fixed continuous *target point*  $d_j \in \mathbb{R}^n$ , and is defined such that its noiseless successor state  $\hat{x}_{k+1} = d_j$ . While not a restriction of our approach, we define one action for every MDP state, and choose the target point to be the center of its region.

The MDP must form a *correct abstraction* of the dynamical system. Thus, action  $a_j$  only exists in an MDP state  $s_i$  if, for every continuous state  $x_k \in R_i$ , there exists a control  $u_k \in \mathcal{U}$ , such that  $\hat{x}_{k+1} = d_j$ . To impose this constraint, we define the *one-step backward reachable set*  $\mathcal{G}(d_j)$ :

$$\mathcal{G}(d_j) = \{x \in \mathbb{R}^n \mid d_j = Ax + Bu_k + q_k, u_k \in \mathcal{U}\}. \quad (4)$$

Then, action  $a_j$  exists in state  $s_i$  if and only if  $R_i \subseteq \mathcal{G}(d_j)$ . Note that the existence of an action in an MDP state merely implies that *for every continuous state* in the associated region, *there exists* a feasible control input that induces this transition. The following assumption asserts that the regions in  $\mathcal{R}$  can indeed be contained in the backward reachable set.

**Assumption 2.** *The backward reachable set  $\mathcal{G}(d_j)$  has a non-empty interior, which implies that matrix  $B$  is full row rank, i.e.,  $\text{rank}(B) = n$ , where  $n = \dim(x)$  in Eq. (1).*

For many systems, we may group together multiple discrete time steps in Eq. (1), such that Assumption 2 holds (see Badings et al. (2021b, Sect. 6) for more details). To compute the actual control  $u_k$  in state  $x_k$  at time  $k$ , we replace  $x_{k+1}$  by  $d_j$  in Eq. (1) and solve for  $u_k$ , yielding:

$$u_k = B^+(d_j - q_k - Ax_k), \quad (5)$$

with  $B^+$  the pseudoinverse of  $B$ . It is easily verified that for every state where action  $a_j$  is enabled, there exists a  $u_k$  such that Eq. (5) holds (depending on  $B$ , it may not be unique).

**Transition probability intervals.** We want to determine the probability  $P(s_i, a_l)(s_j)$  to transition from state  $s_i$  to state  $s_j$  upon choosing action  $a_l$ . In the abstraction, this is equivalent to computing the *cumulative density function* of the distribution over the successor state  $x_{k+1}$  under the polytope  $R_j$  associated with state  $s_j$ . The probability density function  $p_{w_k}(x_{k+1} \mid \hat{x}_{k+1} = d_j)$  captures the distribution over successor states  $x_{k+1}$ , which depends on the process

noise  $w_k$ . By denoting  $P_{w_k}(x_{k+1} \in R_j)$  as the probability that  $x_{k+1}$  takes a value in discrete region  $R_j$ , we write:

$$\begin{aligned} P(s_i, a_l)(s_j) &= P_{w_k}(x_{k+1} \in R_j) \\ &= \int_{R_j} p_{w_k}(x_{k+1} | \hat{x}_{k+1} = d_j) dx_{k+1}. \end{aligned} \quad (6)$$

Recall that the probability density function  $p_{w_k}(\cdot)$  is unknown, making a direct evaluation of Eq. (6) impossible. Instead, we use a sampling-based approach to compute *probability intervals* as explained in Sect. 4.

## 4 Sampling-Based Probability Intervals

We introduce a sampling-based method to estimate the transition probabilities in Eq. (6), based on a finite set of  $N$  observations  $w_k^{(i)} \in \Delta$ ,  $i = 1, \dots, N$  of the process noise. Each sample has a unique index  $i = 1, \dots, N$  and is associated with a possible successor state  $x_{k+1} = \hat{x}_{k+1} + w_k^{(i)}$ . We assume that these samples are available from experimental data or simulations, and are thus obtained at a low cost.

**Assumption 3.** *The noise samples  $w_k^{(i)} \in \Delta$ ,  $i = 1, \dots, N$  are i.i.d. elements from  $(\Delta, \mathbb{P})$ , and are independent of time.*

Due to the samples being i.i.d., the set  $w_k^{(1)}, \dots, w_k^{(N)}$  of  $N$  samples is a random element from the probability space  $\Delta^N$  equipped with the product probability  $\mathbb{P}^N$ .

As an example, we want to evaluate the probability  $P(s_i, a_l)(s_j)$  that state-action pair  $(s_i, a_l)$  induces a transition to state  $s_j$ . A naive *frequentist* approach to approximate the probability would be to determine the fraction of the samples leading to this transition, using the following definition.

**Definition 1.** *The cardinality  $N_j^{\text{in}} \in \{0, \dots, N\}$  of the index set of the samples leading to  $x_{k+1} \in R_j$  is defined as*

$$N_j^{\text{in}} = \left| \{i \in \{1, \dots, N\} \mid (\hat{x}_{k+1} + w_k^{(i)}) \in R_j\} \right|. \quad (7)$$

Similarly, we define  $N_j^{\text{out}} = N - N_j^{\text{in}}$  as the number of samples for which  $\hat{x}_{k+1} + w_k^{(i)}$  is not contained in  $R_j$ .

Note that  $N_j^{\text{in}}$  and  $N_j^{\text{out}}$  depend on both the sample set and the action. The frequentist approach is simple, but may lead to estimates that deviate critically from their true values if the number of samples is limited (we illustrate this issue in practice in Sect. 5.1). In what follows, we introduce our method to be robust against such estimation errors.

### 4.1 Bounds for the transition probabilities

We adapt methods from the scenario approach (Campi and Garatti 2018) to compute *intervals of probabilities* instead of precise estimates. For every probability  $P(s_i, a_l)(s_j)$ , we compute an upper and lower bound (i.e. an interval) that contains the true probability in Eq. (6) with a high confidence. We formalize the resulting abstraction as an iMDP, where these probability intervals enter the uncertain transition function  $\mathcal{P}: S \times \text{Act} \times S \rightarrow \mathbb{I}$ . As the intervals are PAC, this iMDP is a robust abstraction of the dynamical system.

First, we introduce the concept of *risk* (or *violation probability*), which is a measure of the probability that a successor state *is not* in a given region (Campi and Garatti 2008).

**Definition 2.** *The risk  $P_{w_k}(x_{k+1} \notin R_j)$  that a successor state  $x_{k+1}$  is not in region  $R_j$  is*

$$\begin{aligned} P_{w_k}(x_{k+1} \notin R_j) &= \mathbb{P}\{w_k \in \Delta : \hat{x}_k + w_k \notin R_j\} \\ &= 1 - P_{w_k}(x_{k+1} \in R_j). \end{aligned} \quad (8)$$

Crucially for our approach, note that  $P(s_i, a_l)(s_j) = P_{w_k}(x_{k+1} \in R_j)$ . The scenario approach enables us to bound the risk that the optimal point of a so-called *scenario optimization problem* does not belong to a feasible set  $\tilde{R}$  defined by a set of constraints when we are only able to sample a subset of those constraints. By formulating this optimization problem such that  $\tilde{R}$  is closely related to a region  $R_j$ , we obtain upper and lower bounds on the risk over  $R_j$ , and thus also on the corresponding transition probability (we refer to Badings et al. (2021a, Appendix A) for details on the scenario optimization problem). Importantly, this result means that we can adapt the theory from the scenario approach to compute transition probability intervals for our abstractions.

Based on this intuition, we state the main contribution of this section, as a non-trivial variant of Romao, Margellos, and Papachristodoulou (2020, Theorem 5), adapted for our context. Specifically, for a given transition  $(s_i, a_l, s_j)$  and the corresponding number of samples  $N_j^{\text{out}}$  outside of region  $R_j$  (as per Def. 1), Theorem 1 returns an interval that contains  $P(s_i, a_l)(s_j)$  with at least a pre-defined confidence level.

**Theorem 1** (PAC probability intervals). *For  $N \in \mathbb{N}$  samples of the noise, fix a confidence parameter  $\beta \in (0, 1)$ . Given  $N_j^{\text{out}}$ , the transition probability  $P(s_i, a_l)(s_j)$  is bounded by*

$$\mathbb{P}^N \left\{ p \leq P(s_i, a_l)(s_j) \leq \bar{p} \right\} \geq 1 - \beta, \quad (9)$$

where  $\underline{p} = 0$  if  $N_j^{\text{out}} = N$ , and otherwise  $\underline{p}$  is the solution of

$$\frac{\beta}{2N} = \sum_{i=0}^{N_j^{\text{out}}} \binom{N}{i} (1 - \underline{p})^i \underline{p}^{N-i}, \quad (10)$$

and  $\bar{p} = 1$  if  $N_j^{\text{out}} = 0$ , and otherwise  $\bar{p}$  is the solution of

$$\frac{\beta}{2N} = 1 - \sum_{i=0}^{N_j^{\text{out}}-1} \binom{N}{i} (1 - \bar{p})^i \bar{p}^{N-i}. \quad (11)$$

For the proof and technical details of this theorem, we refer to Badings et al. (2021a, Appendix A). Theorem 1 states that with a probability of at least  $1 - \beta$ , the probability  $P(s_i, a_l)(s_j)$  is bounded by the obtained interval. Importantly, this claim holds for *any*  $\Delta$  and  $\mathbb{P}$ , meaning that we can bound the probability in Eq. (6), even when the probability distribution of the noise is unknown.

### 4.2 Practical use of Theorem 1

We describe how we apply Theorem 1 to compute probability intervals of the iMDPs. For every state-action pair  $(s_i, a_l)$ , we obtain  $N$  samples of the noise, and we determine  $N_j^{\text{out}}$  for every  $j \in \{1, \dots, |\mathcal{R}|, |\mathcal{R}| + 1\}$ . Then, we invoke Theorem 1 for every possible successor state  $s_j \in S$ , to compute the bounds on  $P(s_i, a_l)(s_j)$ . Fig. 2 shows this process, where every tick is a successor state  $x_{k+1}$  under a sample of the



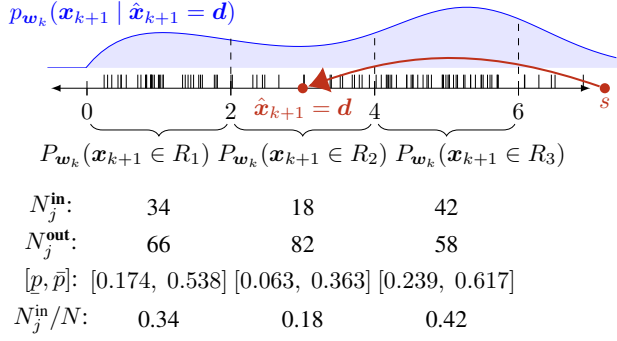


Figure 2: Bounds  $[p, \bar{p}]$  on the probabilities  $P(s, a)(s_j)$  for 3 regions  $j \in \{1, 2, 3\}$ , using  $N = 100$  samples (black ticks) and  $\beta = 0.01$ . The distribution over successor states is  $p_{w_k}(\cdot)$ . Point estimate probabilities are computed as  $N_j^{\text{in}}/N$ .

Algorithm 1: Sampling-based iMDP abstraction.

**Input:** Linear dynamical system; property  $\varphi_{s_I}^K$  (threshold  $\eta$ )  
**Params:** Partition  $\mathcal{R}$ ; confidence lvl.  $\beta$ ; increment factor  $\gamma$   
**Output:** Controller  $\phi$

- 1: Define iMDP states  $S$  and set of enabled actions  $Act$
- 2: Let initial number of samples  $N = N_0$ ,
- 3: Let iteration limit  $z^{\max}$  and  $z = 0$
- 4: **while**  $\underline{Pr}^{\pi^*}(\varphi_{s_I}^K) < \eta$  **and**  $z < z^{\max}$  **do**
- 5:   **for all** actions  $a$  in  $Act$  **do**
- 6:     **for all** successor states  $s$  in  $S$  **do**
- 7:       Compute PAC interval on probability  $P(\cdot, a)(s)$
- 8:     **end for**
- 9:   **end for**
- 10:   Generate iMDP  $\mathcal{M}_{\mathbb{I}} = (S, Act, s_I, \mathcal{P})$  for  $N$  samples
- 11:   Compute  $\pi^*$  and  $\underline{Pr}^{\pi^*}(\varphi_{s_I}^K)$  on  $\mathcal{M}_{\mathbb{I}}$  using PRISM
- 12:   Let  $N = \gamma N$
- 13: **end while**
- 14: **return** piece-wise linear controller  $\phi$  based on  $\pi^*$

noise. This figure also shows point estimates of the probabilities, derived using the frequentist approach. If no samples are observed in a region, we assume that  $P(s_i, a_l)(s_j) = 0$ .

Interestingly, our method is in practice almost as simple as the frequentist approach, but has the notable advantage that we obtain robust intervals of probabilities. Note that Eq. (10) and (11) are cumulative distribution functions of a beta distribution with parameters  $N_j^{\text{out}} + 1$  (or  $N_j^{\text{out}}$ ) and  $N - N_j^{\text{out}}$  (or  $N - N_j^{\text{out}} - 1$ ), respectively (Campi and Garatti 2018), which can directly be solved numerically for  $p$  (or  $\bar{p}$ ). To speed up the computations at run-time, we apply a tabular approach to compute the intervals for all relevant values of  $N$ ,  $\beta$ , and  $k$  up front. We refer to Badings et al. (2021a, Appendix A.2) for an example of how the number of samples controls the tightness of the intervals.

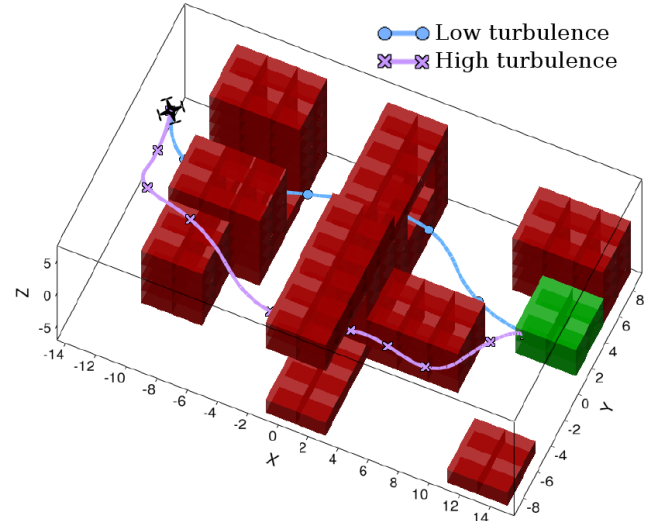


Figure 3: UAV problem (goal in green; obstacles in red), plus trajectories under the optimal iMDP-based controller from  $x_0 = [-14, 0, 6, 0, -6, 0]^T$ , under high and low turbulence.

## 5 Numerical Examples

We implement our iterative abstraction method in Python, and tailor the model checker PRISM (Kwiatkowska, Norman, and Parker 2011) for iMDPs to compute robust optimal policies. We present a pseudocode of our method in Algorithm 1. At every iteration, the obtained iMDP is fed to PRISM, which computes the optimal policy associated with the maximum reachability probability, as per Eq. (3). Our codes are available via <https://gitlab.science.ru.nl/tbadings/sample-abstract>, and all experiments are run on a computer with 32 3.7GHz cores and 64 GB of RAM. We report the performance of our method on: (1) a UAV motion control, (2) a building temperature regulation, and (3) a spacecraft rendezvous problem. In all benchmarks, we use Theorem 1 with  $\beta = 0.01$ , and apply the iterative scheme with  $\gamma = 2$ , starting at  $N = 25$ , with an upper bound of 12,800 samples.

### 5.1 UAV motion planning

We consider the reach-avoid problem for a UAV operating under turbulence, which was introduced in Sect. 1. Our goal is to compute a controller that guarantees (with high confidence) that the probability to reach a goal area, while also avoiding unsafe regions, is above a performance threshold of  $\eta = 0.75$ . We consider a horizon of 64 time steps, and the problem layout is displayed in Fig. 3, with goal and critical regions shown in green and red, respectively. We model the UAV as a system of 3 double integrators (see Badings et al. (2021a, Appendix B) for details). The state  $x_k \in \mathbb{R}^6$  encodes the position and velocity components, and control inputs  $u_k \in \mathbb{R}^3$  model actuators that change the velocity. The effect of turbulence on the state causes (non-Gaussian) process noise, which we model using a Dryden gust model (Bøhn et al. 2019; Dryden 1943). We compare two cases: a) a low turbulence case, and 2) a high turbulence case. We partition the state space into 25,515 regions.

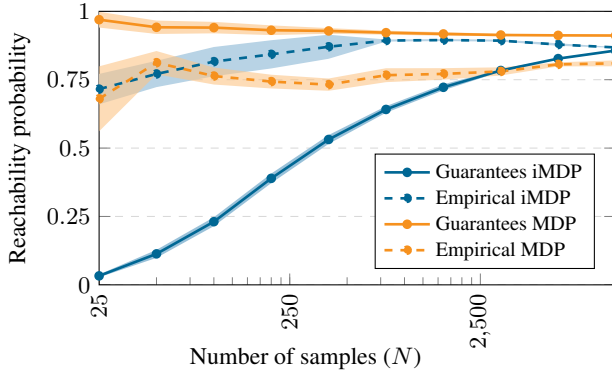


Figure 4: Reachability guarantees on the iMDPs (blue) and MDPs (orange) for their respective policies, versus the resulting empirical (simulated) performance (dashed lines) on the dynamical system. Shaded areas show the standard deviation across 10 iterations. The empirical performance of the MDPs violates the guarantees; that of the iMDPs does not.

**Scalability.** We report the model sizes and run times in Badings et al. (2021a, Appendix B.2). The number of iMDP states equals the size of the partition. Depending on the number of samples  $N$ , the iMDP has 9 – 24 million transitions. The mean time to compute the set of iMDP actions (which is only done in the first iteration) is 15 min. Computing the probabilities plus the verification in PRISM takes 1 – 8 min, depending on the number of samples  $N$ .

**Accounting for noise matters.** In Fig. 3, we show state trajectories under the optimal iMDP-based controller, under high and low turbulence (noise). Under low noise, the controller prefers the short but narrow path; under high noise, the longer but safer path is preferred. Thus, accounting for process noise is important to obtain controllers that are safe.

**iMDPs yield safer guarantees than MDPs.** To show the importance of using robust abstractions, we compare, under high turbulence, our robust iMDP approach against a naive MDP abstraction. This MDP has the same states and actions as the iMDP, but uses precise (frequentist) probabilities. The maximum reachability probabilities (guarantees) for both methods are shown in Fig. 4. For every value of  $N$ , we apply the resulting controllers to the dynamical system in Monte Carlo simulations with 10,000 iterations, to determine the empirical reachability probability. Fig. 4 shows that the non-robust MDPs yield *poor and unsafe performance guarantees*: the actual reachability of the controller is much lower than the reachability guarantees obtained from PRISM. By contrast, our robust iMDP-based approach consistently yields safe lower bound guarantees on the actual performance of controllers. The performance threshold of  $Pr^{\pi^*}(\varphi_{s_t}^K) \geq 0.75$  is guaranteed for  $N = 3,200$  samples and higher.

## 5.2 Building temperature regulation

Inspired by Cauchi and Abate (2018), we consider a temperature control problem for a building with two rooms, both

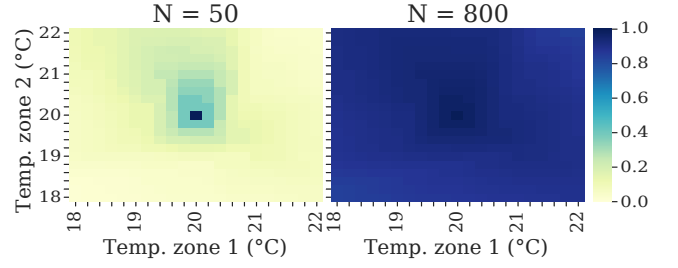


Figure 5: Cross section (for radiator temp. of 38 °C) of the maximum lower bound probabilities to reach the goal of 20 °C from any initial state, for either 50 or 800 samples.

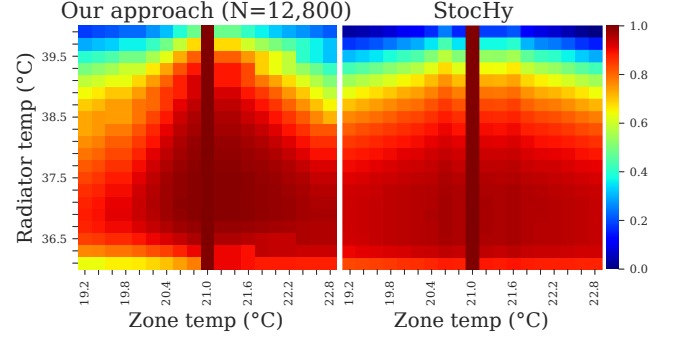


Figure 6: Maximum lower bound probabilities to reach the goal zone temperature of 21 °C from any initial state within 64 steps, for our approach ( $N = 12,800$ ) and StocHy.

having their own radiator and air supply. Our goal is to maximize the probability to reach a temperature of 20 °C in both zones within 32 steps of 15 minutes. The state  $x_k \in \mathbb{R}^4$  of the system (see Badings et al. (2021a, Appendix C) for details) reflects the temperatures of both zones and radiators, and control inputs  $u_k \in \mathbb{R}^4$  change the air supply and boiler temperatures in both zones. The deterministic heat gain through zone walls is modeled by the disturbance  $q_k \in \mathbb{R}^4$ . The noise  $w_k \in \mathbb{R}^4$  has a Gaussian distribution (but this assumption is not required for our approach). We partition the state space into 35,721 regions: 21 values for zone temperatures and 9 for radiator temperatures.

**More samples means less uncertainty.** In Fig. 5, we show (for fixed radiator temperatures) the maximum lower bound probabilities obtained from PRISM, to reach the goal from any initial state. The results clearly show that better reachability guarantees are obtained when more samples are used to compute the iMDP probability intervals. The higher the value of  $N$ , the lower the uncertainty in the intervals, leading to better reachability guarantees. Notably, the largest iMDP has around 200 million transitions, as reported in Badings et al. (2021a, Appendix C.2).

## 5.3 Benchmarks to other control synthesis tools

**StocHy.** We benchmark our method on a building temperature problem against StocHy (Cauchi and Abate 2019), a verification and synthesis tool based on formal abstractions



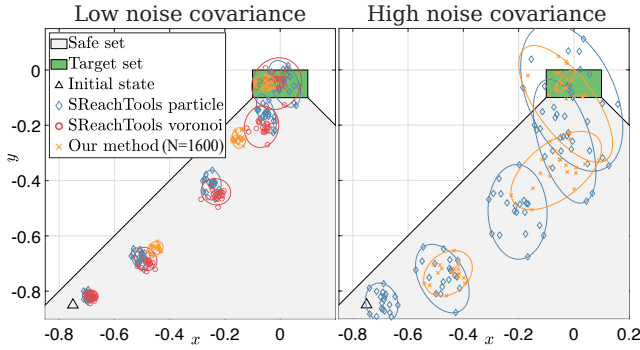


Figure 7: Simulated state trajectories for the spacecraft rendezvous problem, under low and high noise covariance. Our feedback controllers are more robust, as shown by the smaller error in the state trajectories over time (the Voronoi method under high covariance failed to generate a solution).

(see Badings et al. (2021a, Appendix D.1) for details on the setup and results). Similar to our approach, StocHy also derives robust iMDP abstractions. However, StocHy requires precise knowledge of the noise distribution, and it discretizes the control input space of the dynamical system, to obtain a finite action space. The maximum probabilities to reach the goal zone temperature from any initial state obtained for both methods are presented in Fig. 6. The obtained results are qualitatively similar, and close to the goal temperature, our lower bound reachability guarantees are *slightly higher* than those obtained from StocHy. However, when starting at temperatures close to the boundary (e.g. at both low radiator and zone temperature), the guarantees obtained from our approach are *slightly more conservative*. This is due to the fact that our approach relies on PAC guarantees on the transition probabilities, while StocHy gives straight probabilistic outcomes. While both methods yield results that are qualitatively similar, our approach is an order of magnitude faster (45 min for StocHy, vs. 3 – 9 s for our approach; for detailed results, see Badings et al. (2021a, Appendix D.1 and Table 1).

**SReachTools.** We apply our method to the spacecraft rendezvous benchmark (see Fig. 7) of SReachTools (Vinod, Gleason, and Oishi 2019), an optimization-based toolbox for probabilistic reachability problems (we refer to Badings et al. (2021a, Appendix D.2 and Table 2) for more details). While we use samples to generate a model abstraction, SReachTools employs sample-based methods over the properties directly. Distinctively, SReachTools does not create abstractions (as in our case) and is thus generally faster than our method. However, its complexity is exponential in the number of samples (versus linear complexity for our method). Importantly, we derive *feedback* controllers, while the sampling-based methods of SReachTools compute *open-loop* controllers. Feedback controllers respond to state observations over time and are, therefore, more robust against strong disturbances from noise, as also shown in Fig. 7.

## 6 Concluding Remarks and Future Work

We have presented a novel sampling-based method for robust control of autonomous systems with process noise of unknown distribution. Based on a finite-state abstraction, we have shown how to compute controllers with PAC guarantees on the performance on the continuous system. Our experiments have shown that our method effectively solves realistic problems and provides safe lower bound guarantees on the performance of controllers.

**Nonlinear systems.** While we have focused on linear dynamical systems, as discussed in Remark 1, we wish to develop extensions to nonlinear systems. Such extensions are non-trivial and may require more involved reachability computations (Bansal et al. 2017; Chen, Ábrahám, and Sankaranarayanan 2013). Specifically, the main challenge is to compute the enabled iMDP actions via the backward reachable set defined in Eq. (4), which may become non-convex under nonlinear dynamics. Note that computing the PAC probability intervals remains unchanged, as the scenario approach relies on the convexity of the target set only, and not on that of the backward reachable set. Alternatively, we may apply our method on a linearized version of the nonlinear system. However, in order to preserve guarantees, one must then account for any linearization error.

**State space discretization.** The discretization of the state space influences the quality of the reachability guarantees: a more fine-grained partition yields an abstraction that is a more accurate representation of the dynamical system, but also increases the computational complexity. In the future, we plan to employ adaptive discretization schemes to automatically balance this trade-off, such as in Soudjani and Abate (2013).

**Safe exploration.** Finally, we wish to incorporate other uncertainties in Eq. (1), such as state/control-dependent process noise, or measurement noise. Moreover, we may drop the assumption that the system matrices are precisely known, such that we must simultaneously learn about the unknown deterministic dynamics and the stochastic noise. Learning deterministic dynamics is common in safe learning control (Brunke et al. 2021), but enabling safe exploration requires strong assumptions on stochastic uncertainty. This is a challenging goal, as it conflicts with our assumption that the distribution of the process noise is completely unknown.

## Acknowledgments

We would like to thank Licio Romao for his helpful discussions related to the scenario approach and our main theorem.

## References

- Abate, A.; Prandini, M.; Lygeros, J.; and Sastry, S. 2008. Probabilistic reachability and safety for controlled discrete time stochastic hybrid systems. *Automatica*, 44(11): 2724 – 2734.
- Alur, R.; Henzinger, T. A.; Lafferriere, G.; and Pappas, G. J. 2000. Discrete abstractions of hybrid systems. *Proceedings of the IEEE*, 88(7): 971–984.

- Anderson, B. D.; and Moore, J. B. 2007. *Optimal control: linear quadratic methods*. Courier Corporation.
- Ashok, P.; Kretínský, J.; and Weininger, M. 2019. PAC Statistical Model Checking for Markov Decision Processes and Stochastic Games. In *CAV (1)*, volume 11561 of *Lecture Notes in Computer Science*, 497–519. Springer.
- Åström, K. J.; and Murray, R. M. 2010. *Feedback systems: an introduction for scientists and engineers*. Princeton university press.
- Badings, T. S.; Abate, A.; Jansen, N.; Parker, D.; Poonawala, H. A.; and Stoelinga, M. 2021a. Sampling-Based Robust Control of Autonomous Systems with Non-Gaussian Noise. Technical report, CoRR, abs/2110.12662.
- Badings, T. S.; Jansen, N.; Poonawala, H. A.; and Stoelinga, M. 2021b. Filter-Based Abstractions with Correctness Guarantees for Planning under Uncertainty. *CoRR*, abs/2103.02398.
- Baier, C.; and Katoen, J. 2008. *Principles of model checking*. MIT Press.
- Bansal, S.; Chen, M.; Herbert, S. L.; and Tomlin, C. J. 2017. Hamilton-Jacobi reachability: A brief overview and recent advances. In *CDC*, 2242–2253. IEEE.
- Berkenkamp, F.; Turchetta, M.; Schoellig, A. P.; and Krause, A. 2017. Safe Model-based Reinforcement Learning with Stability Guarantees. In *NIPS*, 908–918.
- Blackmore, L.; Ono, M.; Bektassov, A.; and Williams, B. C. 2010. A Probabilistic Particle-Control Approximation of Chance-Constrained Stochastic Predictive Control. *IEEE Trans. Robotics*, 26(3): 502–517.
- Bøhn, E.; Coates, E. M.; Moe, S.; and Johansen, T. A. 2019. Deep Reinforcement Learning Attitude Control of Fixed-Wing UAVs Using Proximal Policy optimization. In *ICUAS*, 523–533. IEEE.
- Boucheron, S.; Lugosi, G.; and Massart, P. 2013. *Concentration Inequalities - A Nonasymptotic Theory of Independence*. Oxford University Press.
- Brafman, R. I.; and Tennenholtz, M. 2002. R-MAX - A General Polynomial Time Algorithm for Near-Optimal Reinforcement Learning. *J. Mach. Learn. Res.*, 3: 213–231.
- Brunke, L.; Greeff, M.; Hall, A. W.; Yuan, Z.; Zhou, S.; Panerati, J.; and Schoellig, A. P. 2021. Safe Learning in Robotics: From Learning-Based Control to Safe Reinforcement Learning. *CoRR*, abs/2108.06266.
- Campi, M. C.; and Garatti, S. 2008. The Exact Feasibility of Randomized Solutions of Uncertain Convex Programs. *SIAM J. Optim.*, 19(3): 1211–1230.
- Campi, M. C.; and Garatti, S. 2018. *Introduction to the scenario approach*. SIAM.
- Cauchi, N.; and Abate, A. 2018. Benchmarks for cyber-physical systems: A modular model library for building automation systems (Extended version). *CoRR*, abs/1803.06315.
- Cauchi, N.; and Abate, A. 2019. StocHy: Automated Verification and Synthesis of Stochastic Processes. In *TACAS (2)*, volume 11428 of *Lecture Notes in Computer Science*, 247–264. Springer.
- Chen, X.; Ábrahám, E.; and Sankaranarayanan, S. 2013. Flow\*: An Analyzer for Non-linear Hybrid Systems. In *CAV*, volume 8044 of *Lecture Notes in Computer Science*, 258–263. Springer.
- Clarke, E. M.; Emerson, E. A.; and Sistla, A. P. 1986. Automatic Verification of Finite-State Concurrent Systems Using Temporal Logic Specifications. *ACM Trans. Program. Lang. Syst.*, 8(2): 244–263.
- Cubuktepe, M.; Jansen, N.; Junges, S.; Katoen, J.; and Topcu, U. 2020. Scenario-Based Verification of Uncertain MDPs. In *TACAS (1)*, volume 12078 of *Lecture Notes in Computer Science*, 287–305. Springer.
- Dryden, H. L. 1943. A review of the statistical theory of turbulence. *Quarterly of Applied Mathematics*, 1(1): 7–42.
- Esfahani, P. M.; and Kuhn, D. 2018. Data-driven distributionally robust optimization using the Wasserstein metric: performance guarantees and tractable reformulations. *Math. Program.*, 171(1-2): 115–166.
- Fisac, J. F.; Akametalu, A. K.; Zeilinger, M. N.; Kaynama, S.; Gillula, J. H.; and Tomlin, C. J. 2019. A General Safety Framework for Learning-Based Control in Uncertain Robotic Systems. *IEEE Trans. Autom. Control.*, 64(7): 2737–2752.
- Fu, J.; and Topcu, U. 2014. Probably Approximately Correct MDP Learning and Control With Temporal Logic Constraints. In *Robotics: Science and Systems*.
- Garatti, S.; and Campi, M. 2019. Risk and complexity in scenario optimization. *Mathematical Programming*, 1–37.
- García, J.; and Fernández, F. 2015. A comprehensive survey on safe reinforcement learning. *J. Mach. Learn. Res.*, 16: 1437–1480.
- Givan, R.; Leach, S. M.; and Dean, T. L. 2000. Bounded-parameter Markov decision processes. *Artif. Intell.*, 122(1-2): 71–109.
- Goh, J.; and Sim, M. 2010. Distributionally robust optimization and its tractable approximations. *Operations research*, 58(4-part-1): 902–917.
- Hahn, E. M.; Hashemi, V.; Hermanns, H.; Lahijanian, M.; and Turrini, A. 2017. Multi-objective Robust Strategy Synthesis for Interval Markov Decision Processes. In *QEST*, volume 10503 of *Lecture Notes in Computer Science*, 207–223. Springer.
- Haussler, D. 1990. Probably Approximately Correct Learning. In *AAAI*, 1101–1108. AAAI Press / The MIT Press.
- Herbert, S. L.; Chen, M.; Han, S.; Bansal, S.; Fisac, J. F.; and Tomlin, C. J. 2017. FaSTrack: A modular framework for fast and guaranteed safe motion planning. In *CDC*, 1517–1522. IEEE.
- Hewing, L.; Kabzan, J.; and Zeilinger, M. N. 2020. Cautious Model Predictive Control Using Gaussian Process Regression. *IEEE Trans. Control. Syst. Technol.*, 28(6): 2736–2743.
- Kearns, M. J.; and Singh, S. P. 2002. Near-Optimal Reinforcement Learning in Polynomial Time. *Mach. Learn.*, 49(2-3): 209–232.
- Koller, T.; Berkenkamp, F.; Turchetta, M.; and Krause, A. 2018. Learning-Based Model Predictive Control for Safe Exploration. In *CDC*, 6059–6066. IEEE.

- Kulakowski, B. T.; Gardner, J. F.; and Shearer, J. L. 2007. *Dynamic modeling and control of engineering systems*. Cambridge University Press.
- Kwiatkowska, M. Z.; Norman, G.; and Parker, D. 2011. PRISM 4.0: Verification of Probabilistic Real-Time Systems. In *CAV*, volume 6806 of *Lecture Notes in Computer Science*, 585–591. Springer.
- Lahijanian, M.; Andersson, S. B.; and Belta, C. 2015. Formal Verification and Synthesis for Discrete-Time Stochastic Systems. *IEEE Trans. Autom. Control.*, 60(8): 2031–2045.
- Lavaei, A.; Soudjani, S.; Abate, A.; and Zamani, M. 2021. Automated verification and synthesis of stochastic hybrid systems: A survey. *arXiv preprint arXiv:2101.07491*.
- Lesser, K.; Oishi, M. M. K.; and Erwin, R. S. 2013. Stochastic reachability for control of spacecraft relative motion. In *CDC*, 4705–4712. IEEE.
- Margellos, K.; Goulart, P.; and Lygeros, J. 2014. On the road between robust optimization and the scenario approach for chance constrained optimization problems. *IEEE Transactions on Automatic Control*, 59(8): 2258–2263.
- Park, S.; Serpedin, E.; and Qaraqe, K. A. 2013. Gaussian Assumption: The Least Favorable but the Most Useful [Lecture Notes]. *IEEE Signal Process. Mag.*, 30(3): 183–186.
- Puggelli, A.; Li, W.; Sangiovanni-Vincentelli, A. L.; and Seshia, S. A. 2013. Polynomial-Time Verification of PCTL Properties of MDPs with Convex Uncertainties. In *CAV*, volume 8044 of *Lecture Notes in Computer Science*, 527–542. Springer.
- Puterman, M. L. 1994. *Markov Decision Processes: Discrete Stochastic Dynamic Programming*. Wiley Series in Probability and Statistics. Wiley.
- Reist, P.; Preiswerk, P.; and Tedrake, R. 2016. Feedback-motion-planning with simulation-based LQR-trees. *Int. J. Robotics Res.*, 35(11): 1393–1416.
- Romao, L.; Margellos, K.; and Papachristodoulou, A. 2020. Tight generalization guarantees for the sampling and discarding approach to scenario optimization. In *CDC*, 2228–2233. IEEE.
- Rosolia, U.; Singletary, A.; and Ames, A. D. 2020. Unified Multi-Rate Control: from Low Level Actuation to High Level Planning. *CoRR*, abs/2012.06558.
- Sartipizadeh, H.; Vinod, A. P.; Açikmese, B.; and Oishi, M. 2019. Voronoi Partition-based Scenario Reduction for Fast Sampling-based Stochastic Reachability Computation of Linear Systems. In *ACC*, 37–44. IEEE.
- Shmarov, F.; and Zuliani, P. 2015. ProbReach: verified probabilistic delta-reachability for stochastic hybrid systems. In *HSCC*, 134–139. ACM.
- Smith, A. 2013. *Sequential Monte Carlo methods in practice*. Springer Science & Business Media.
- Soudjani, S. E. Z.; and Abate, A. 2013. Adaptive and Sequential Gridding Procedures for the Abstraction and Verification of Stochastic Processes. *SIAM J. Appl. Dyn. Syst.*, 12(2): 921–956.
- Taylor, A. J.; Singletary, A.; Yue, Y.; and Ames, A. D. 2020. Learning for Safety-Critical Control with Control Barrier Functions. In *L4DC*, volume 120 of *Proceedings of Machine Learning Research*, 708–717. PMLR.
- Tedrake, R. 2009. LQR-trees: Feedback motion planning on sparse randomized trees. In *Robotics: Science and Systems*. The MIT Press.
- Vinod, A. P.; Gleason, J. D.; and Oishi, M. M. K. 2019. SReachTools: a MATLAB stochastic reachability toolbox. In *HSCC*, 33–38. ACM.
- Wiesemann, W.; Kuhn, D.; and Sim, M. 2014. Distributionally Robust Convex Optimization. *Oper. Res.*, 62(6): 1358–1376.
- Wolff, E. M.; Topcu, U.; and Murray, R. M. 2012. Robust control of uncertain Markov Decision Processes with temporal logic specifications. In *CDC*, 3372–3379. IEEE.