

Compression behaviour of an extremely lightweight structure with a gyroid core used for bridge bearings

Sengsri, Pasakorn; Kaewunruen, Sakdirat

DOI:

[10.1016/j.matpr.2022.04.703](https://doi.org/10.1016/j.matpr.2022.04.703)

License:

Creative Commons: Attribution (CC BY)

Document Version

Publisher's PDF, also known as Version of record

Citation for published version (Harvard):

Sengsri, P & Kaewunruen, S 2022, 'Compression behaviour of an extremely lightweight structure with a gyroid core used for bridge bearings', *Materials Today: Proceedings*, vol. 65, no. 2, pp. 1656-1659.
<https://doi.org/10.1016/j.matpr.2022.04.703>

[Link to publication on Research at Birmingham portal](#)

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.



Contents lists available at ScienceDirect

Materials Today: Proceedings

journal homepage: www.elsevier.com/locate/matpr

Compression behaviour of an extremely lightweight structure with a gyroid core used for bridge bearings

Pasakorn Sengsri*, Sakdirat Kaewunruen

Laboratory for Track Engineering and Operations for Future Uncertainties (TOFU Lab), School of Engineering, The University of Birmingham, Edgbaston B15 2TT, Birmingham, United Kingdom

ARTICLE INFO

Article history:

Available online 29 April 2022

Keywords:

Bridge bearings

Triply periodic minimal surfaces (TPMS)

Gyroid unit cell

ABSTRACT

This article reports an extremely lightweight structure used as a sandwich core for bridge bearings due to their superior mechanical properties, such as uniform stress distribution with no concentration stresses at the intersection of the structure, lightweight, rigidity, and energy absorption. The structure is based on triply periodic minimal surfaces (TPMS) conceived by observing the scales of butterflies' wings. The compression behaviour of this innovative structure used in these typical bearings is not well-known and has never been fully investigated. Therefore, it is important to comprehend their compression behaviour and also to identify a failure mode of these bridge bearings under compression. A gyroid unit cell finite element model used in the sandwich core for bridge bearing application is examined with a computational method. The numerical investigation shows the compression mechanisms and provides the failure mode, which is important in establishing relationships between its mechanical performance and geometry. The results have shown that the model exhibits a stretch-dominated and uniform stress distribution behaviour under compression. These results can be implemented to better generate informed lightweight structure designs for bridge bearings which are subjected to different compression conditions.

Copyright © 2022 Elsevier Ltd. All rights reserved.

Selection and peer-review under responsibility of the scientific committee of the International Conference on Advances in Construction Materials and Structures. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Over the past 50 years, multiple base isolation systems have been developed. Commonly, they consist of an elastomeric bearing and energy dissipators, for example, steel plates, lead-plugs, etc. In some cases, these bearings are a combination of sliding bearings and re-centre devices. In terms of bridge design, elastomeric bearings used as bridge bearings play a crucial role, which provides the longer fundamental period of free vibration of a structure.

Another function of bridge bearings is not only to facilitate lateral or torsional displacement induced by temperature variations and vibrations, but also to withstand and transfer vertical forces from the superstructure to the substructure of a bridge. Over the past 80 years, bridge bearings have been examined and their current design requirements are based on a study [1–4]. This study reports the better understanding of compressive behaviour of bridge bearings.

Recently, steel/fibre-reinforced elastomeric bridge bearings, also referred to as steel/fibre reinforced laminated ones, have been presented to be used in bridge system, in order to better perform with increasing vertical stiffness [5,6]. However, they seem to occur bulging behaviour under compression as shown in Fig. 1 and to result in the stress concentrations at the edges of steel/fibre shims as well as the failure of delamination between the reinforcements and the elastomer due to low adhesive bond for plain and steel/fibre-reinforced elastomeric bridge bearings, respectively.

According to our previous works related to the development of a common bridge bearing under different loading in [7–11], we have efforded to eliminate their drawbacks by using a lattice structure as a sandwich structure in typical bridge bearings for bridge system. This is because a lattice structure is likely to provide a better performance to ratio when compared to an elastomeric bearing [8].

To the best of our knowledge following a critical review of the available literature, there is no extant research on the compression behaviour of a gyroid unit cell used as a core for a bridge bearing. This study focuses on the development of a novel unit cell model using a gyroid structure for bridge bearing applications. The

* Corresponding author.

E-mail address: pxs905@student.bham.ac.uk (P. Sengsri).

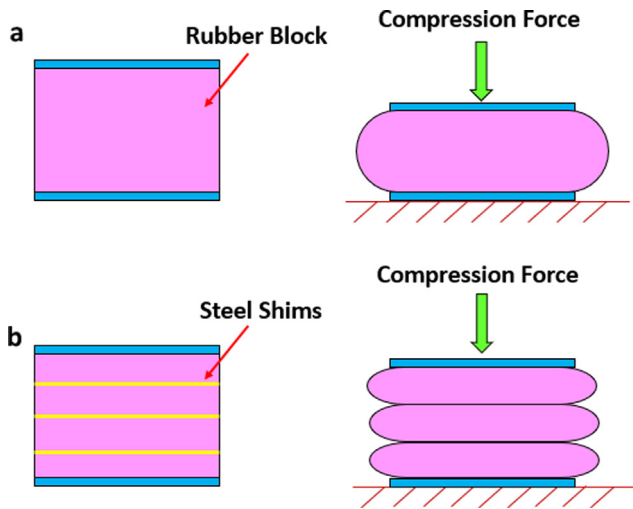


Fig. 1. (a) Massive bulging behaviour of an elastomeric bridge bearing, (b) layer-by-layer bulging behaviour of a steel/fibre-reinforced bridge bearing under compression.

force–displacement relationship and normal stress distribution at a 50 per cent strain of the model in compression are investigated and obtained through finite element method using Abaqus software. In the further section, a material and method for this paper will be presented, followed by numerical results of the gyroid unit cell model under compression.

2. Methodology strategy

The key concept of this paper is to better understand the compressive behaviour of a gyroid unit cell used as a sandwich core for bridge bearings, also to reduce the computation time for its simulation. According to a review in [12], Ashby mentions that there are three key factors affecting the mechanical properties of porous structures, which are arrangement pattern, materials, and density. Elastic finite element (FE) analysis is employed to investigate the idea behaviour of the proposed gyroid unit cell model to obtain its force–displacement and stress distribution.

3. Finite element modelling of a gyroid unit cell model

3.1. Unit cell design

Triply periodic minimal surface (TPMS) gyroid can be created through different methods. In this paper, the method to a gyroid three-dimensional modelling is based on the following level curvature equation [13].

$$\sin\left(\frac{2\pi x}{h}\right) * \cos\left(\frac{2\pi y}{h}\right) + \sin\left(\frac{2\pi y}{h}\right) * \cos\left(\frac{2\pi z}{h}\right) + \sin\left(\frac{2\pi z}{h}\right) * \cos\left(\frac{2\pi x}{h}\right) = k \tag{1}$$

where *h* denotes the size of a fundamental cell and *k* determines the cross section of the sheet, which affects the relative density of the structure.

After that, a CAD software is used for this method allowing to generate a three-dimensional surface by means of equation. Furthermore, this software can create a gyroid solid structure from this surface. Fig. 2 shows a gyroid unit cell model for a bridge bear-

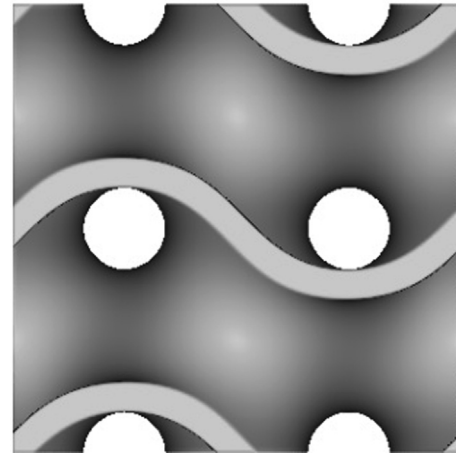


Fig. 2. A gyroid unit cell model in CAD software.

ing core. The dimensions of the unit cell model are 50 × 50 × 50 mm with a thickness of 2 mm.

3.2. Applied force and boundary conditions

To observe the behaviour of an extremely lightweight structure for bridge bearings based on the investigation of the gyroid unit cell model, it is important to select proper boundary conditions. For compression simulation, the model is based on the isotropic material model in Abaqus software and compression displacement is applied to a reference point to move towards the base of the model. In terms of boundary conditions, the reference point in the middle of the upper faces of the model constraints all nodes on the upper faces and another reference point in the middle of the lower faces is fixed. Furthermore, the displacement loading for this compressive model is applied by using the static general FEA model on Abaqus software (see Fig. 3).

3.3. Material properties

The model material utilised for the finite element simulation in this paper is UV resin. The proposed UV resin material properties are provided in Table 1.

3.4. Data collection

Compression FEA model is run and force–displacement curve is plotted. A force is determined from the reaction force as vertical

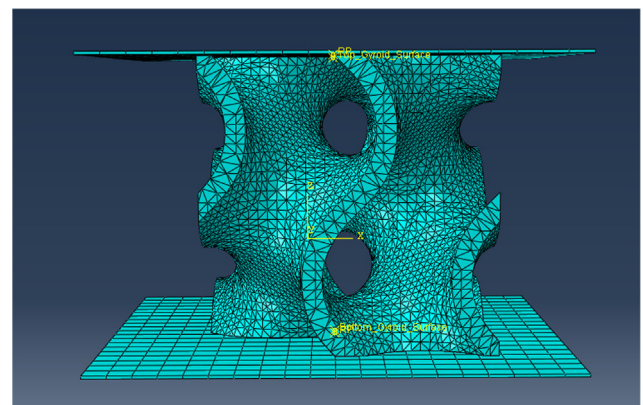


Fig. 3. The mesh of a gyroid unit cell model in Abaqus software.

Table 1
Material properties of UV resin material.

Parameter lists	Values	Units
Young's modulus	686.03	MPa
Shear Modulus	257.90	MPa
Density	1100	kg/m ³

deformation is applied to the middle reference point on the upper faces of the model. Also, the stiffness of the gyroid unit cell model is calculated by dividing force with applied displacement in the linear elastic region.

4. Results and discussion

Fig. 4 presents the force–displacement curve of the compressive behavior of the gyroid unit cell model used as a sandwich core for bridge bearings. It is clear that the graph presents the common stretch-dominated behavior of the gyroid unit cell model and its vertical stiffness is 1.71 kN/mm. The graph reaches its elastic limit at nearly 6.8 kN before a softening post yielding response, followed by a basin region which can be observed in the graph due to the continuous collapse of the gyroid sheets. Then, the structure of the gyroid unit cell model trends to carry more loads due to its

densification. Furthermore, Fig. 5 shows the stress distribution visualization of the model obtained from the numerical results. It has shown that the model provides a uniform stress distribution which can eliminate a stress concentration.

5. Conclusions

In this study, a force–displacement curve and stress distribution behaviour of a gyroid unit cell model used for a bridge bearing core is observed to potentially predict the stretch-dominated behavior of a gyroid sandwich core under compression for bridge bearing applications considerably well [12]. As a result, the gyroid unit cell model would be practical for use when the model validation is carried out to compare its experimental results. Furthermore, additional work in the near future will be assessed on the bridge bearing lattice model with a combination of gyroid unit cells under compression loading.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

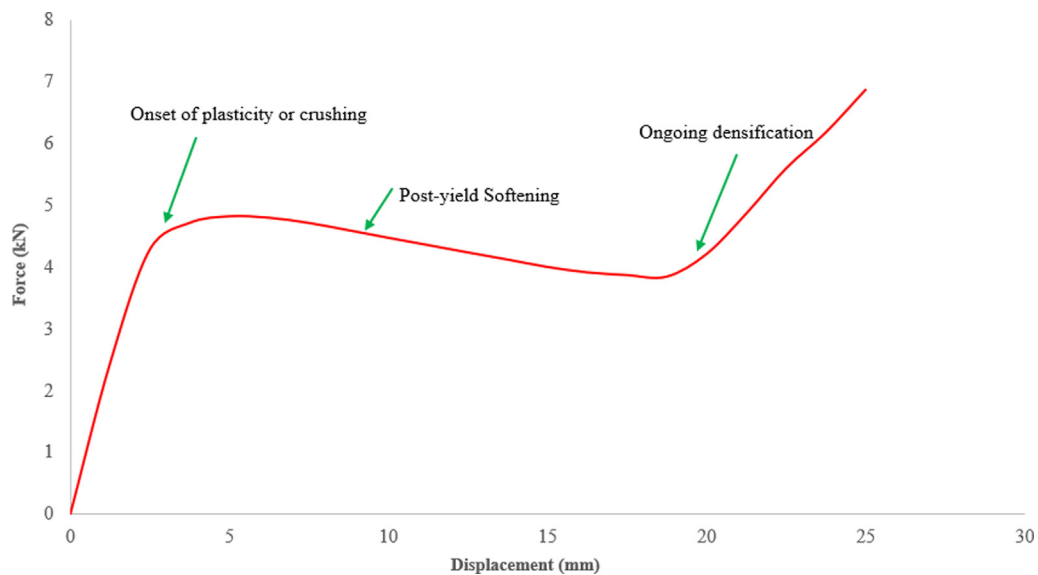


Fig. 4. Force-displacement curve of the gyroid unit cell model used for bridge bearings sandwich core at 25 mm enforced displacement.

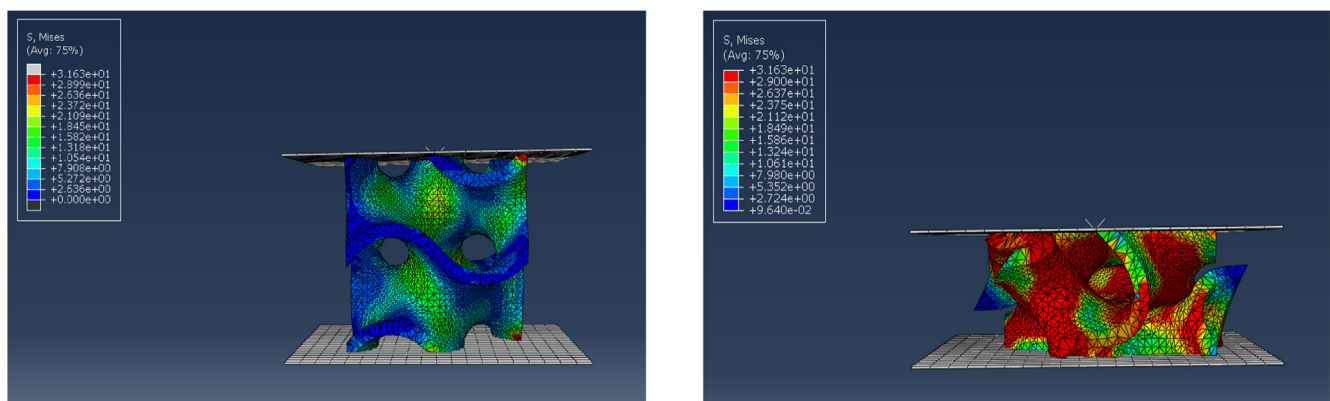


Fig. 5. Uniform stress distribution of the compressive behaviour of the gyroid unit cell model (a) at a strain of 25 %. (b) at a strain of 50 %.

Acknowledgments

The first author wishes to thank the Royal Thai Government for his Scholarship at the University of Birmingham. The last author wishes to gratefully acknowledge the Japan Society for Promotion of Science (JSPS) for his JSPS Invitation Research Fellowship (long-term), Grant No. L15701, at the Track Dynamics Laboratory, Railway Technical Research Institute and at Concrete Laboratory, the University of Tokyo, Tokyo, Japan. The JSPS financially supports this work as part of the research project, entitled “Smart and reliable railway infrastructure”. Special thanks to the European Commission for H2020-MSCA-RISE Project No. 691135 “RIS-EN: Rail Infrastructure Systems Engineering Network” (www.risen2rail.eu) accessed 16 Aug. 2021. Partial support from H2020 Shift2Rail Project No. 730849 (S-Code) is acknowledged. In addition, the sponsorships and assistance from LORAM, Network Rail, RSSB (Rail Safety and Standard Board, UK) are highly appreciated.

References

- [1] Australian Standard “Elastomeric bearings for use in structures, 1981, pp. 1523–1981.
- [2] British Standards Institution “BS5400: Steel. Concrete and Composite Bridges, Parts 9A and 9B”, 1983.
- [3] Highways Directorate, Department of the Environment, UK ‘Design recommendations for elastomeric bridge bearings’, Technical Memorandum BEI/76, 1976.
- [4] Ministry of Works and Development, New Zealand “Design fleadrubber bridge bearings’, Civil Engineering Division, CDP 818/A., Wellington, NZ, 1981.
- [5] F. Naeim, J. Kelly, *Design of Seismic Isolated Structures: From Theory to Practice*, John Wiley & Sons, USA, 1999.
- [6] C.J. Derham, S.B.B. Learoyd, L.R. Wootton, ‘Buildings on springs to resist earthquakes, in: Proc., 5th European Conf. on Earthquake Engineering, International Committee on Earthquake Engineering, Istanbul, Turkey, 1975.
- [7] P. Sengsri, S. Kaewunruen, Local failure modes and critical buckling loads of a meta-functional auxetic sandwich core for composite bridge bearing applications, *Appl. Sci.* 11 (2021) 10844, <https://doi.org/10.3390/app112210844>.
- [8] P. Sengsri, S. Kaewunruen, Additive manufacturing meta-functional composites for engineered bridge bearings: a review, *Constr. Build. Mater.* 262 (2020) 120535.
- [9] P. Sengsri, H. Fu, S. Kaewunruen, Mechanical properties and energy-absorption capability of a 3D-printed TPMS sandwich lattice model for meta-functional composite bridge bearing applications, *J. Compos. Sci.* 6 (3) (2022) 71, <https://doi.org/10.3390/jcs6030071>.
- [10] P. Sengsri, R.M. Marsico, S. Kaewunruen, IOP Conference Series: Mater. Sci. Eng., vol. 603, pp. 02206.
- [11] P. Sengsri, C. Baniotopoulos, S. Kaewunruen, Engineered model for the numerical investigation into vibration characteristics of a novel bridge bearing under free-free and fixed boundary condition, in: EURO DYN 2020 XI International Conference on Structural Dynamics: EURO DYN 2020. European Association for Structural Dynamics, EURO DYN 2020 XI International Conference on Structural Dynamics, Athens, Greece, 23/11/20, 2020.
- [12] M.F. Ashby, *The properties of foams and lattices*, *Philos. Trans. R. Soc. Lond. A Math. Phys. Eng. Sci.* 364 (2006) 15–30.
- [13] P. Hanzl et al., Cellular lattice structure produced by selective laser melting and its mechanical properties, in: Proceedings of the 26th DAAAM Int. Symposium, Vienna, 2015, pp. 748–752.