

A new class of alumina-forming superalloy for 3D printing

Ghousoub, Joseph N.; Klupś, Przemysław; Dick-Cleland, William J.B.; Rankin, Kathryn E.; Utada, Satoshi; Bagot, Paul A.J.; McCartney, D. Graham; Tang, Yuanbo T.; Reed, Roger C.

DOI:

[10.1016/j.addma.2022.102608](https://doi.org/10.1016/j.addma.2022.102608)

License:

Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

Document Version

Publisher's PDF, also known as Version of record

Citation for published version (Harvard):

Ghousoub, JN, Klupś, P, Dick-Cleland, WJB, Rankin, KE, Utada, S, Bagot, PAJ, McCartney, DG, Tang, YT & Reed, RC 2022, 'A new class of alumina-forming superalloy for 3D printing', *Additive Manufacturing*, vol. 52, 102608. <https://doi.org/10.1016/j.addma.2022.102608>

[Link to publication on Research at Birmingham portal](#)

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.


Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.



Research paper

A new class of alumina-forming superalloy for 3D printing

Joseph N. Ghoussoub^a, Przemysław Klupś^a, William J.B. Dick-Cleland^b, Kathryn E. Rankin^c, Satoshi Utada^a, Paul A.J. Bagot^a, D. Graham McCartney^a, Yuanbo T. Tang^{a,*}, Roger C. Reed^{a,d}

^a Department of Materials, University of Oxford, Parks Road, Oxford, OX1 3PH, UK

^b Alloyed Ltd. Yarnton, Kidlington OX5 1QU, UK

^c μ -VIS X-ray Imaging Centre, Faculty of Engineering and Physical Sciences, University of Southampton, SO17 1BJ, UK

^d Department of Engineering Science, University of Oxford, Parks Road, Oxford, OX1 3PJ, UK

ARTICLE INFO

Keywords:

Additive manufacturing
Ni-based superalloys
Alloy design
Micro-CT
Creep
Oxidation

ABSTRACT

A new class of crack-resistant nickel-based superalloy containing high γ' fraction is studied for the laser-powder bed fusion (L-PBF) process. The effects of the (Nb+Ta)/Al ratio is emphasized, a strategy that is shown to confer excellent low-temperature strength whilst maintaining oxidation resistance at high temperatures via stable alumina scale formation. The processability of the new alloys is characterized with respect to defect assessment by micro-focus X-ray computed tomography; use is made of a prototype turbine blade geometry and the heritage alloy CM247LC as a benchmark. In all cases, some processing-related porosity is present in thin wall sections such as the trailing edge, but this can be avoided by judicious processing. The cracking seen in CM247LC – in solid-state, liquation and solidification forms – is avoided. A novel sub-solvus heat treatment strategy is proposed which takes advantage of AM not requiring solutioning; super-solvus heat treatment is inappropriate since it embrittles the material by deterioration of the texture and coarsening of grain boundary carbides. The tensile strength of the new superalloy is greatest when the Nb+Ta content is highest and exceeds that of CM247LC up to ~ 900 °C. The oxidation resistance is best when Al content is highest, and oxidation-assisted cracking resistance maximized when the (Nb+Ta)/Al ratio is balanced. In all cases these are equivalent or superior to that of CM247LC. Nevertheless, the creep resistance of the new alloys is somewhat inferior to that of CM247LC for which the γ' , C, and B contents are higher; this implies a processing/property trade-off which requires further clarification.

1. Introduction

The Achilles' heel of 3D printing is the propensity for processing-related defects to occur [1], due to the rapid cooling rates induced and thermal-cycling intrinsic to the process [2]. This is particularly the case for the nickel-based superalloys whose degradation mechanisms are time dependent and sensitive to defects [3]; modes of defect formation include porosity [4], solidification cracking [5] and solid-state cracking [6]. Such susceptibility is a disadvantage because conventional processing – involving investment casting for example – has evolved over many years to be a largely defect-free route with which 3D printing must compete [7]. Its inherent advantages such as a strong coupling to computer-aided design technology help in this regard [8].

There are factors that can accelerate the insertion of 3D printing into high temperature applications, such as the gas turbine industry and rocketry [1]. One approach involves tailoring the process through better understanding of the heat transfer and thermal-mechanical effects arising. The use of pre-heating [9] and multiple heat sources [10], or

else adoption of optimal heat source parameters, such as hatching [11] and patterns [12] are good examples of this first strategy. Alternatively, one can improve the input material employed as feedstock, since a new process such as 3D printing may require new grades of alloy to be designed [3,13]. There is evidence that this second approach has its merit [14]. Alloy design approaches are emerging for this purpose and have achieved some successes in chromia-forming superalloys up to 900 °C [15,16], where a synergy of strength and ductility can be achieved whilst the material remains printable.

Nevertheless, with the demand for higher operation temperatures to give greater thermal efficiency in gas turbines, higher γ' fraction additive manufactured (AM) superalloys are required and are indeed under development [17,18]. This category of alloys are known as the alumina-forming superalloys, since aluminium is utilized to form a protective scale at operating temperatures over 1000 °C. The oxidation resistance at these temperatures is one of the limiting factors for long term service [19]. The chromia-scale is unstable and less protective at

* Corresponding author.

E-mail address: yuanbo.tang@materials.ox.ac.uk (Y.T. Tang).

<https://doi.org/10.1016/j.addma.2022.102608>

Received 20 October 2021; Received in revised form 14 December 2021; Accepted 6 January 2022

Available online 5 February 2022

2214-8604/© 2022 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Table 1
Compositions of the alloy powders at%.

Alloy	Ni	Al	Co	Cr	Mo	Nb	Ta	Ti	W	C	B	Hf	(Nb+Ta)/Al
Alloy 1	bal.	11.5	19.2	10.2	0.75	1.4	1.1	0.15	2.2	0.18	0.03	–	0.22
Alloy 2	bal.	10.4	19.4	10.3	0.75	1.8	1.5	0.15	2.3	0.18	0.03	–	0.32
Alloy 3	bal.	9.6	19.8	10.2	0.78	2.4	1.9	0.15	2.4	0.16	0.03	–	0.45
CM247LC	bal.	12.2	9.4	9.5	0.34	0	1.1	0.91	3.1	0.35	0.11	0.47	

those conditions, failing by volatilization [20] and spallation [19], so that the intended environmental resistance cannot be delivered. The oxidation property of superalloys can be estimated by the activity of the scale forming element, for example of either Al or Cr [21]. In addition, other design merit indices were also employed, such as strength, creep resistance, AM processability, density and cost. The compositions were proposed using the alloys-by-design (ABD) framework, which has been proven for superalloys processes by investment casting [22], powder metallurgy [23] and AM [15].

In this body of work, we examine the processing and performance of a new grade of superalloy for high temperature applications. Three distinct attributes are considered: processability by laser-powder bed fusion (L-PBF), heat treatment response and finally the oxidation and mechanical behaviour. In this way, a holistic picture of the processing/property relationship is built up. We make use of a benchmark alloy, CM247LC, which is a widely available heritage alloy usually processed using conventional investment casting. It is also an alumina-forming superalloy but contains an even higher γ' fraction than the novel alloy examined here. The performances of three variants of the new alloy are compared with that of CM247LC. Consistent with the intended applications of these materials, the high temperature properties are emphasized particularly in creep and oxidation; the low temperature strength in the athermal regime is also considered.

2. Experimental methods

2.1. Alloy compositions and feedstock materials

A new Ni-based superalloy [24] designed for additive manufacturing (AM) has been studied. The alloy was designed using the Alloys-by-Design (ABD) method [22] allowing for a multi-objective optimization of various property trade-offs. Comprehensive descriptions of this alloy design methodology can be found in [15,24,25]. In this case, the alloy processability by L-PBF as well as the creep resistance, oxidation resistance, predicted maximal theoretical strength, and density have been considered.

Three variants of the alloy named Alloy 1, Alloy 2, and Alloy 3 were made available by Alloyed Ltd. for the present study on the basis of these criteria. These three compositions are calculated to have equal equilibrium γ' volume fraction of 0.5 at 900 °C, but possess varying (Nb+Ta)/Al ratios. This allowed for an experimental study of how the enrichment of γ' with either Al or (Nb+Ta) altered the properties highlighted above. The equilibrium γ' volume fraction as a function of temperature for each composition was predicted by Thermo-Calc employing the TTNi8 database [26]. The measured γ' area fraction at room temperature (following HT3 in Table 2) was 0.68, 0.7, and 0.69 for Alloys 1, 2, and 3 respectively. Alloy 3 had the greatest (Nb+Ta) content with reduced Al content, Alloy 1 had greatest Al content with reduced (Nb+Ta), and Alloy 2 had an intermediate (Nb+Ta)/Al ratio. These alloys were bench marked against the heritage CM247LC alloy.

The pre-alloyed argon gas atomized feedstock powders were prepared by Aubert & Duval with median particle diameter (D50) between 32.3 and 33.0 μm . The D10 and D50 values were ~ 19 and 55 μm respectively. The measured alloy powder compositions, as determined by inductively coupled plasma-optical emission spectroscopy (ICP-OES) and ICP-combustion analysis, are given in Table 1. The powder particles were predominantly spherical, with a small number of satellites and other morphological irregularities present.

2.2. Processing by additive manufacturing

L-PBF was carried out by Alloyed Ltd. using a Renishaw AM 400 pulsed fibre laser system of wavelength 1075 nm under an argon atmosphere with a build plate size of $80 \times 80 \times 64 \text{ mm}^3$. The processing parameters employed were: laser power 200 W, laser focal spot diameter 70 μm , powder layer thickness 30 μm , and pulse exposure time 60 μs . A 'meander' laser scan path pattern was used with hatch spacing of 70 μm and laser scan speed of 0.875 m/s, the path frame of reference was rotated by 67° with each layer added. In order to produce a high quality surface finish, the laser traced the border of the sample after each layer, the laser speed on the borders was reduced to 0.5 m/s. Each alloy powder was processed with these parameters. These were selected on the basis of a previous study of the influence of processing conditions on cracking in CM247LC [27].

For each alloy, the same build plate configuration was employed comprising several geometries. Cubes of dimensions $10 \times 10 \times 10 \text{ mm}^3$ were printed for microstructural characterization and for the preparation of oxidation test coupons. Vertical bars of dimensions $10 \times 10 \times 52 \text{ mm}^3$ were printed and were used for the machining of mechanical test pieces. These bars were manufactured with 16 inverted pyramid legs in order to allow for easy removal from the baseplate. Discs of diameter 3 mm and height 1 mm were produced for differential scanning calorimetry (DSC). Turbine blade shaped-parts were printed to simulate the manufacture of an engineering component; in this case representative of those used in a helicopter engine, these had a height of 30 mm.

2.3. Materials characterization

2.3.1. Optical and scanning electron microscopy (SEM)

Optical microscopy was used to assess the cracking susceptibility. The cube samples were sectioned on planes parallel (termed XZ or YZ) and perpendicular (termed XY plane) to the build direction. Thus with this definition, the XY plane has as its normal the build direction. For the XY plane, a section was taken at the mid-height. The severity of cracking was determined by imaging the XY plane; 5 images were considered per alloy. The ImageJ software [28] was used to compare the alloys by determining the crack count density (cracks/ mm^2) and crack length density (mm/mm^2) – note that the crack length was defined as the caliper diameter corresponding to the largest line length across each crack. The microstructure was investigated in the as-printed, heat treated, and oxidized condition using backscattered electron (BSE) imaging and energy dispersive X-ray spectroscopy (EDX) in a Zeiss Merlin Gemini 2 field emission gun scanning electron microscope (FEG-SEM) equipped with an Oxford Instruments X-Max energy-dispersive detector and a electron backscattered diffraction (EBSD) system. EDX maps were acquired using accelerating voltage of 10 kV and probe current 500 pA. Samples were electrolytically etched to remove the γ matrix using 10% phosphoric acid at 3V direct current in order to observe the γ' size, distribution, and morphology.

2.3.2. Atom probe tomography (APT)

The Alloy 1 and Alloy 3 cubes were cut into rectangular prism matchsticks of dimensions $10 \times 1 \times 1 \text{ mm}^3$ using a Struers Accutom-50. These were prepared for atom probe analysis through electrochemical polishing in a solution of 25% perchloric acid and 90% acetic acid with voltage of 25 V. A second stage of polishing to finalize the tip

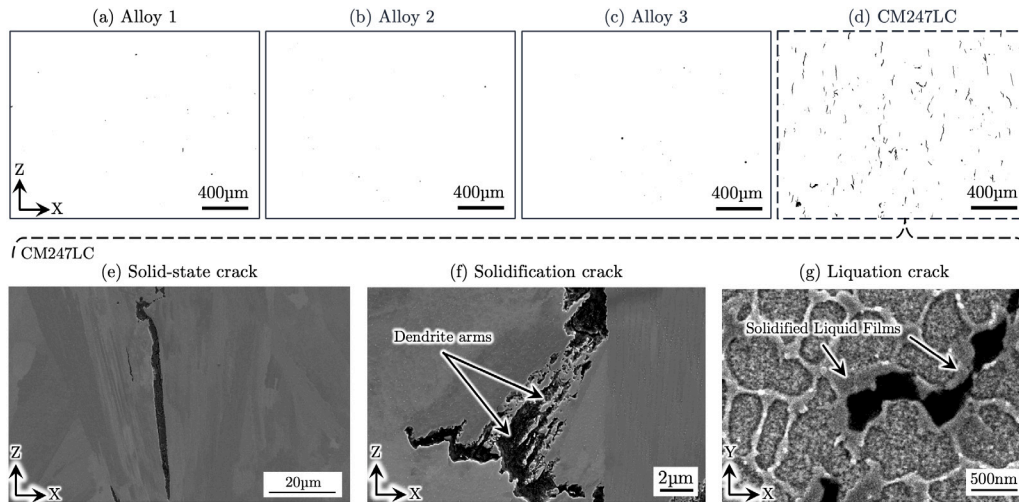


Fig. 1. (a–d) Optical micrographs with black and white threshold applied showing the cracking in CM247LC vs. lack thereof in Alloy variants 1-3. SEM micrographs showing examples of (e) solid-state cracking (f) solidification and (g) liquation cracking observed in CM247LC.

was done in a solution of 2% perchloric acid and 98% butoxyethanol with voltage of 20 V. Specimens were analysed using a Cameca LEAP 5000XR system with detection rate of 52% and laser wavelength 355 nm. Samples were cryogenically cooled to 50 K inside an ultra high vacuum chamber at $<4 \times 10^{-11}$ Torr. Laser mode was employed at a pulse frequency of 200 Hz and energy 50 pJ. The datasets were reconstructed using Integrated Visualization and Analysis Software (IVAS). Due to the laser mode, the crystallographic poles could not be used for more accurate spatial calibration. The parameters used were image compression factor (ICF) of 1.65, and an initial cap radius of 35 and 25 nm as well as geometric field-factor of 3.3 and 4.5 for Alloy 1 and Alloy 3 respectively. The $\gamma - \gamma'$ interface of primary γ' precipitates was analysed in tips produced from Alloys 1 and 3 using cuboid regions of interest that have axes normal to the interface. These volumes were divided into bins of width of 0.5 nm and the composition of each bin was calculated using AtomprobeLab software and the error of the composition of each element was calculated as established in Ref. [29].

2.3.3. X-ray computed tomography (XCT)

X-ray computed tomography of the turbine blade-shaped samples was carried out with a custom Nikon XTEK XTH 225 kVp micro-focus CT system fitted with a 2000×2000 pixel Perkin Elmer XRD 1621 CN14 HS Detector (PerkinElmer Optoelectronics, Germany). In order to detect the micron length scale defects characteristic of L-PBF a slice of the top 1 mm of the turbine blade was machined by wire electrical discharge machining (EDM) for analysis. Three separate XCT scans were performed on each sample which were concatenated together to maximize the voxel (volume element or cubic pixel) resolution achievable for the entire length.

Scans were performed at 210 kVp peak voltage and 42 μ A current, with a source to object distance of 17 mm and an source to detector distance of 797 mm. Using an analogue gain of 24 dB, 3142 projection images were acquired throughout 360 degrees rotation, averaging 8 frames per projection with 1 s exposure time per frame. Projection images were reconstructed into 32 bit float volumes using filtered back-projection algorithms implemented within CTPro3D and CTAgent software v2.2 (Nikon Metrology, UK). These were downsampled to 8 bit (to reduce processing time), manually thresholded and converted to binary. The defects were quantified in terms of size distribution. The size was defined by defect volume using the 3D objects counter in ImageJ. A further analysis of a $\sim 500 \times 500 \times 500 \mu\text{m}^3$ sub-volume in the bulk of the CM247LC was carried out to understand the crack morphology in 3D.

Table 2

Heat treatments applied to Alloy 2.

Process	Stage 1	Stage 2	Stage 3
HT 1 (super-solvus)	1220 °C 2 h AC	1100 °C 4 h AC	850 °C 20 h AC
HT 2 (sub-solvus)	1100 °C 4 h AC	850 °C 20 h AC	–
HT 3 (sub-solvus)	1080 °C 4 h AC	–	–

2.4. Heat treatment

In order to design suitable heat treatments, differential scanning calorimetry (DSC) was first used to determine the heat treatment window. A NETZSCH 404 F1 Pegasus instrument with a nitrogen cover gas flowing at 50 ml/min was employed. Samples were heated to 700 °C at 20 K/min, then from 700 °C to 1450 °C at 10 K/min. The γ' solvus temperature was determined by the inflexions in the DSC signal following Chapman and Quedstedt [30,31]. The γ' solvus temperatures were 1172, 1179, 1182, and 1249 °C for Alloy 1, Alloy 2, Alloy 3, and CM247LC respectively.

Super-solvus and sub-solvus heat treatments (HT) designated HT 1 and HT2 respectively were performed on Alloy 2 on the basis of the measured γ' solvus temperature. A further sub-solvus single step heat treatment designated HT3 was performed to assess the feasibility of achieving properties with reduced time. These three heat treatments are summarized in Table 2, each heat treatment step was followed by air cooling (AC).

2.5. Oxidation study

Thermo-gravimetric analysis (TGA) was used to assess the oxidation resistance of the alloy, using a NETZSCH STA 449 F1 Jupiter. Specimens of dimensions 10 mm \times 10 mm \times 1 mm were cut perpendicular to the build direction and polished to a mirror finish with 4000 grit SiC paper. The tests were carried out in 5 steps, initially a protective Ar gas was run for 1 h to ensure equilibrium of the system. This was followed by an increase in temperature at a rate of 20 K/min to the test temperature of 1000 °C which was then followed by a hold for 30 min under protective Ar and then the onset of the oxidizing laboratory air flow at a rate of 50 ml/min for 24 h. After this period the sample is cooled to room temperature at 20 K/min. The evolution of mass gain was analysed starting at the onset of oxidizing air. A set of 10 BSE images were taken of the oxide layer and γ' depletion zone in each alloy to quantify their thickness and size using a macro in ImageJ.

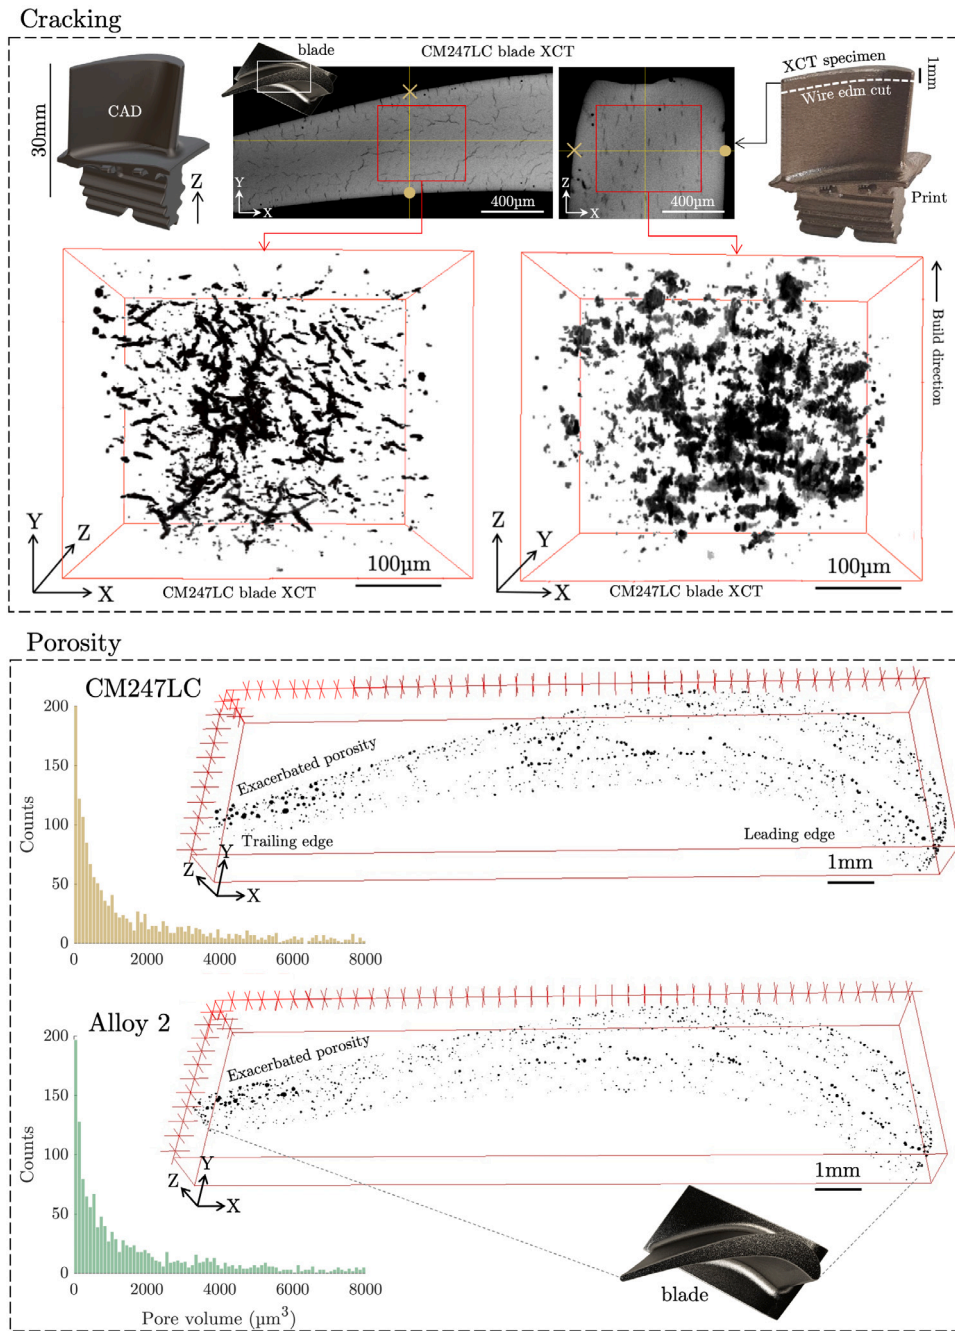


Fig. 2. Slices of the CM247LC blade sample XY and XZ planes as observed by XCT and 3D reconstruction of cracks as observed on each plane. Quantification of porosity and 3D reconstruction showing where porosity occurred in CM247LC and Alloy 2.

2.6. Thermo-mechanical testing

2.6.1. Tensile properties

Isothermal uniaxial tensile tests were performed using an Instron electro-thermal mechanical testing (ETMT) machine with a 5 kN load cell. Specimens of full length 40 mm, gauge length 14 mm, and 1 mm² cross sectional area were machined with axis along the build direction from the additively manufactured bars by wire electrical discharge machining (EDM), and polished to mirror finish 4000 grit SiC paper to negate the influence of EDM induced surface defects. The strain was measured via a non-contact iMetrum video extensometry system. Joule heating under free expansion conditions was employed to reach the test temperatures using a heating rate of 200 K/s. The temperature

was measured by spot-welding a K-type thermocouple to the centre of specimen gauge.

The four compositions were tested at room temperature and in the range of 600–1100 °C in increments of 100 °C. Specimens were strained rapidly at a rate of 10⁻² s⁻¹ to reduce the influence of dynamic precipitation during testing and facilitate high-throughput experimental work. At all temperatures the flow stress respectively were taken as the 0.2% flow stress. The sub-solvus and super-solvus properties of Alloy 2 were additionally compared across the temperature range by testing at a strain rate of 10⁻³ s⁻¹.

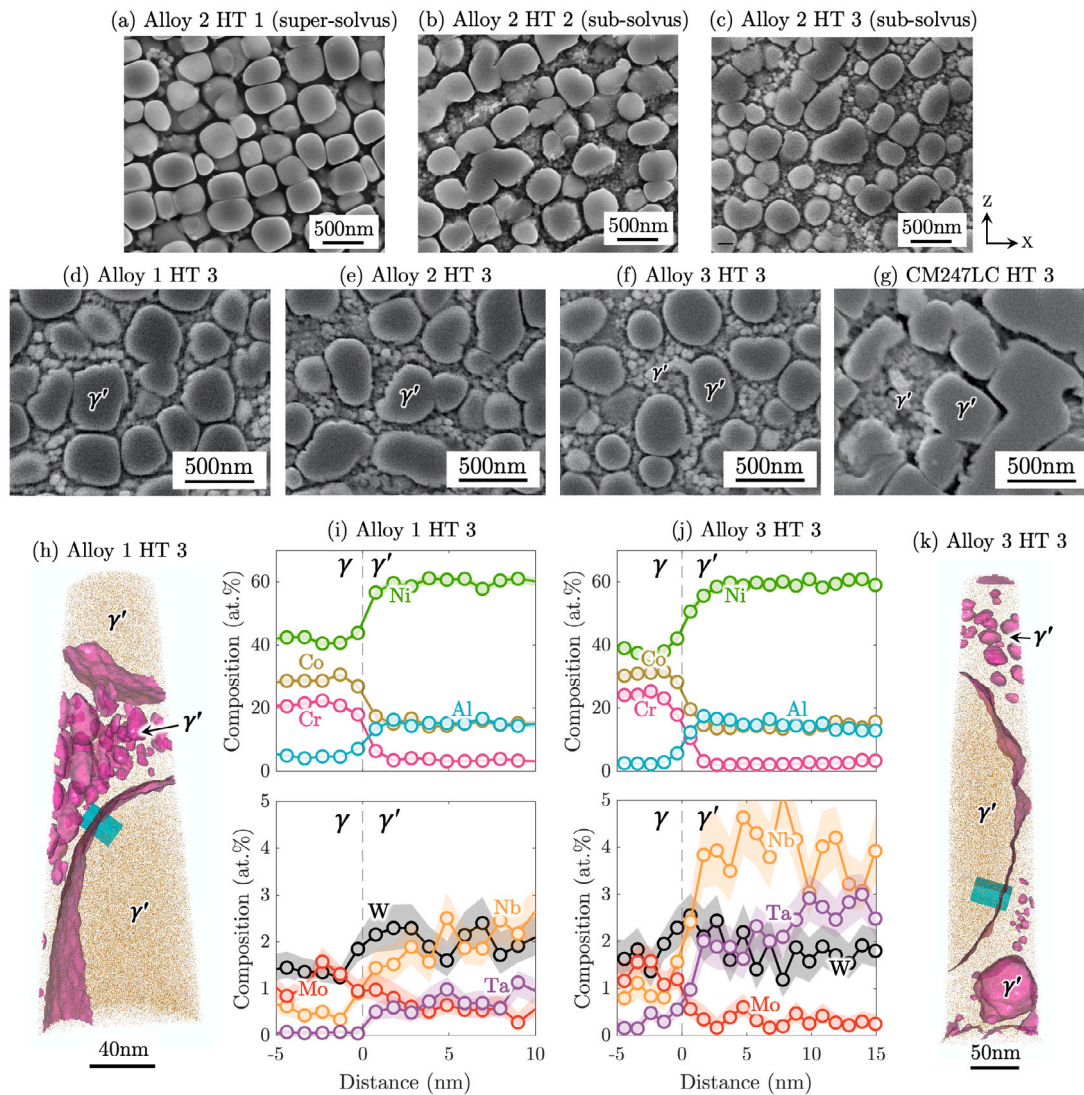


Fig. 3. SE micrographs showing the γ' inside the grain of the Alloy 2 microstructure following (a) HT 1 (b) HT 2 (c) HT 3 and of (d) Alloy 1 (e) Alloy 2 (f) Alloy 3 and (g) CM247LC after HT 3. Micrographs were all taken on the XZ plane. The 3D reconstruction of the atom probe tip of (h) Alloy 1 and (k) Alloy 3 following HT 3 showing 13.5 at% Cr iso-surfaces around γ' precipitates as well as the cuboid regions of interest used to extract concentration profiles across the γ - γ' interface. The concentration profiles across the γ - γ' interface are shown for (i) Alloy 1 and (j) Alloy 3.

2.6.2. Creep testing

For each alloy, bars of dimensions $10 \times 10 \times 52 \text{ mm}^3$ were heat treated and machined into specimens for creep testing. Bars were heat treated at $1080 \text{ }^\circ\text{C}$ for 4 h and air cooled. The selection of this sub-solvus heat treatment is elucidated in the results section. Bars were machined and tested externally by the accredited laboratory Westmoreland Mechanical Testing & Research, Ltd in accordance to ASTM E139. Samples were machined with gauge length of 20 mm and full length of 52 mm. Creep tests were performed at temperatures ranging between $800 \text{ }^\circ\text{C}$ and $1050 \text{ }^\circ\text{C}$ at various stress levels between 500 MPa and 180 MPa

2.6.3. Resistance to oxidation-assisted cracking (OAC)

In order to assess the capability of the alloys to withstand oxidation-assisted cracking (OAC), specimens were tensile tested by ETMT at strain rates of 10^{-2} s^{-1} , 10^{-3} s^{-1} , and 10^{-5} s^{-1} in laboratory air at $800 \text{ }^\circ\text{C}$. This methodology, developed by Németh et al. [33], allows for the assessment of the influence of oxidation on crack growth which is critical for high temperature component design [34].

3. Results

3.1. Resistance to processing induced defects

With regard to processability, the situation has been found to be very complicated so in this first introductory paragraph – in order to improve readability – an overview is first provided; further confirmatory evidence is provided in the following two paragraphs.

Consider Fig. 1 which contains optical micrographs taken within the bulk of XZ plane cross-sections – containing the build direction – obtained from printed cubes. These micrographs illustrate that the new compositions print with no evidence of defects, at least within the bulk, cracks were not detected across an area of 100 mm^2 at a magnification of $100 \times$. On the other hand, alloy CM247LC was found to contain crack-like defects due to processing; measured were a crack count density of $\sim 49 \text{ cracks/mm}^2$ and crack length density of 2.6 mm/mm^2 . The cracking density measured in CM247LC did not increase markedly following heat treatment ($\sim 51 \text{ cracks/mm}^2$). The disparity in behaviour between the new alloys and CM247LC is further evidence for the strong composition dependence of cracking in L-PBF processing consistent with observations reported elsewhere [35]. Nevertheless, for all

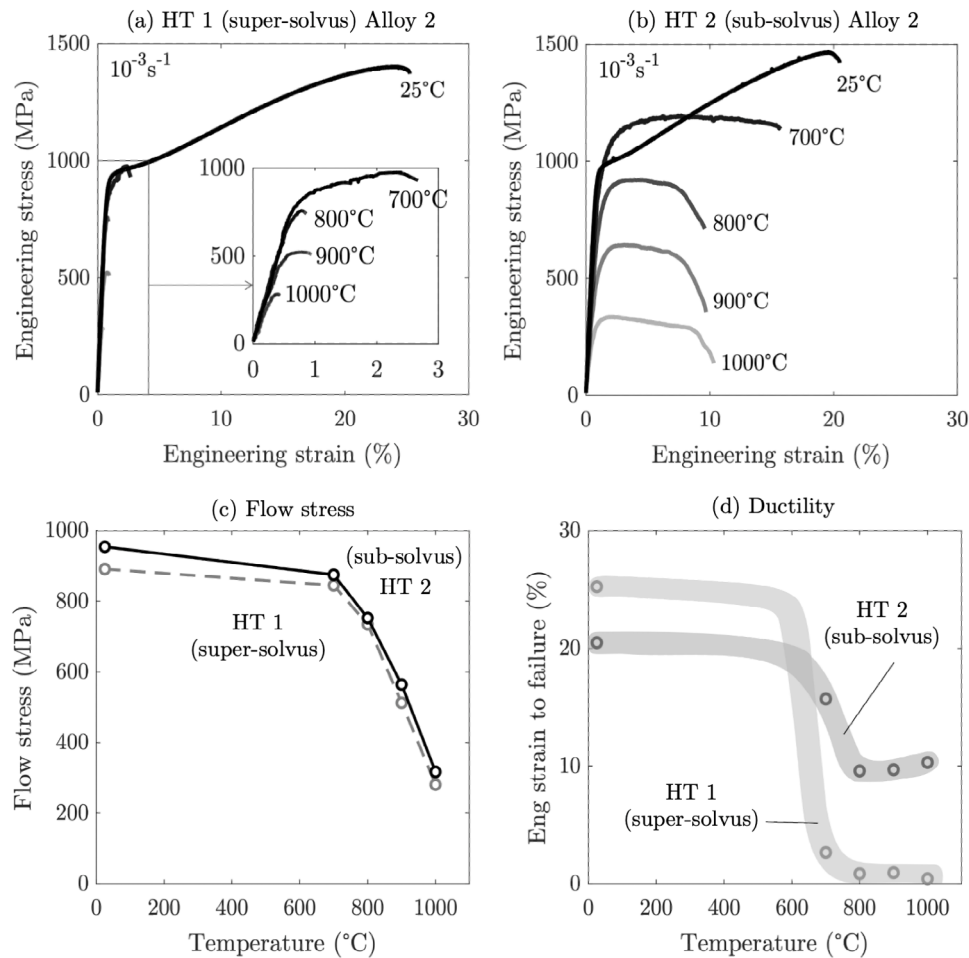


Fig. 4. Tensile response of Alloy 2 at various temperatures following (a) HT 1 (super-solvus) and (b) HT 2 (sub-solvus), as well as their summarized (c) flow stress and (d) ductility across the temperature range.

compositions examined here – both CM247LC and the novel compositions – the edges of the built structures contained gas-related porosity which remained following the harsh thermal-fluid flow induced by the laser/material interaction and indeed the higher energy density processing which was carried out at these locations [36]. This suggests that the formation of such gas porosity is not strongly related to alloy composition but rather to processing conditions. In what follows below, further evidence is provided for purposes of corroboration.

With regard to the crack-like defects in CM247LC, optical microscopy on the 2D sections XZ confirm a strong directionality, with the cracks appearing largely straight and aligned in the Z build direction. Further characterization by SEM indicates that cracks formed by three mechanisms: solid-state, solidification, and liquation cracking [32,37]. Examples of these types of cracks is shown in Fig. 1. The presence of solid-state cracks is strongly evidenced by their length being greater than the dimensions of a single melt pool – the use of the pulsed laser system employed here results in discretized melting events. These melt pools were determined to have radii of $>70 \mu\text{m}$; on the basis of this it was concluded that cracks of length greater than $70 \mu\text{m}$ propagated at least in part in the solid-state. The occurrence of solidification cracks is supported by the presence of retained dendritic features, which confirm that separation occurred in the presence of liquid phase. Lastly, the manifestation of liquation cracking is suggested by μm length scale cracks with smoothed edges indicative of a solidified liquid film [15]. Characterization using micro-XCT on the printed turbine blades has helped to elucidate the situation further, by revealing the 3D nature of cracking in CM247LC. Cracks were not detected by XCT for any grades of the new alloy, but for CM247LC cracking was detected

by XCT throughout the entirety of top 1 mm of the blade profile characterized, as shown in Fig. 2. Analysis of the sub-volume in the CM247LC blade revealed the 3D shape of the cracks; when observed on the XY plane they appear skeleton-like, whereas when observed on the XZ or YZ plane they appear plate-like. This supports observations made by optical microscopy and arises because cracking occurs along high angle grain boundaries (HAGB) [5,38] and the microstructure produced by AM is highly textured with grains elongated in the build direction (Z-axis).

We now turn to the gas-related porosity. Quantification of the XCT data shows porosity occurred to the same extent and in both new alloys and CM247LC. The total number of pores, mean, median, and max pores volumes were 1561, $3690 \mu\text{m}^3$, $1090 \mu\text{m}^3$, and $15590 \mu\text{m}^3$ for Alloy 2 and 1860, $4350 \mu\text{m}^3$, $885 \mu\text{m}^3$, and $18920 \mu\text{m}^3$ for CM247LC. Porosity occurred largely at the sample edges, hence it provides a delineation of the outline of the blade when visualized in 3D. In all cases here, porosity was exacerbated at the trailing edge and leading edge. The influence of processing conditions on porosity has been widely reported [4,39,40] where increased energy density in particular can cause keyholing and entrainment of the chamber cover gas [36]. The reduced scan velocity used at the sample edges – selected to improve the sample surface finish – is possibly a contribution to the porosity observed. Furthermore, the thin sections at the trailing edge have incurred even greater gas porosity due to the beam turning corners frequently and increasing further the mean energy density [41,42]. The spatial dependence of defects in the blades confirms geometric changes – even in a small blade – have profound influence on the local formation of defects. Hence, the influence of changing geometry suggests that

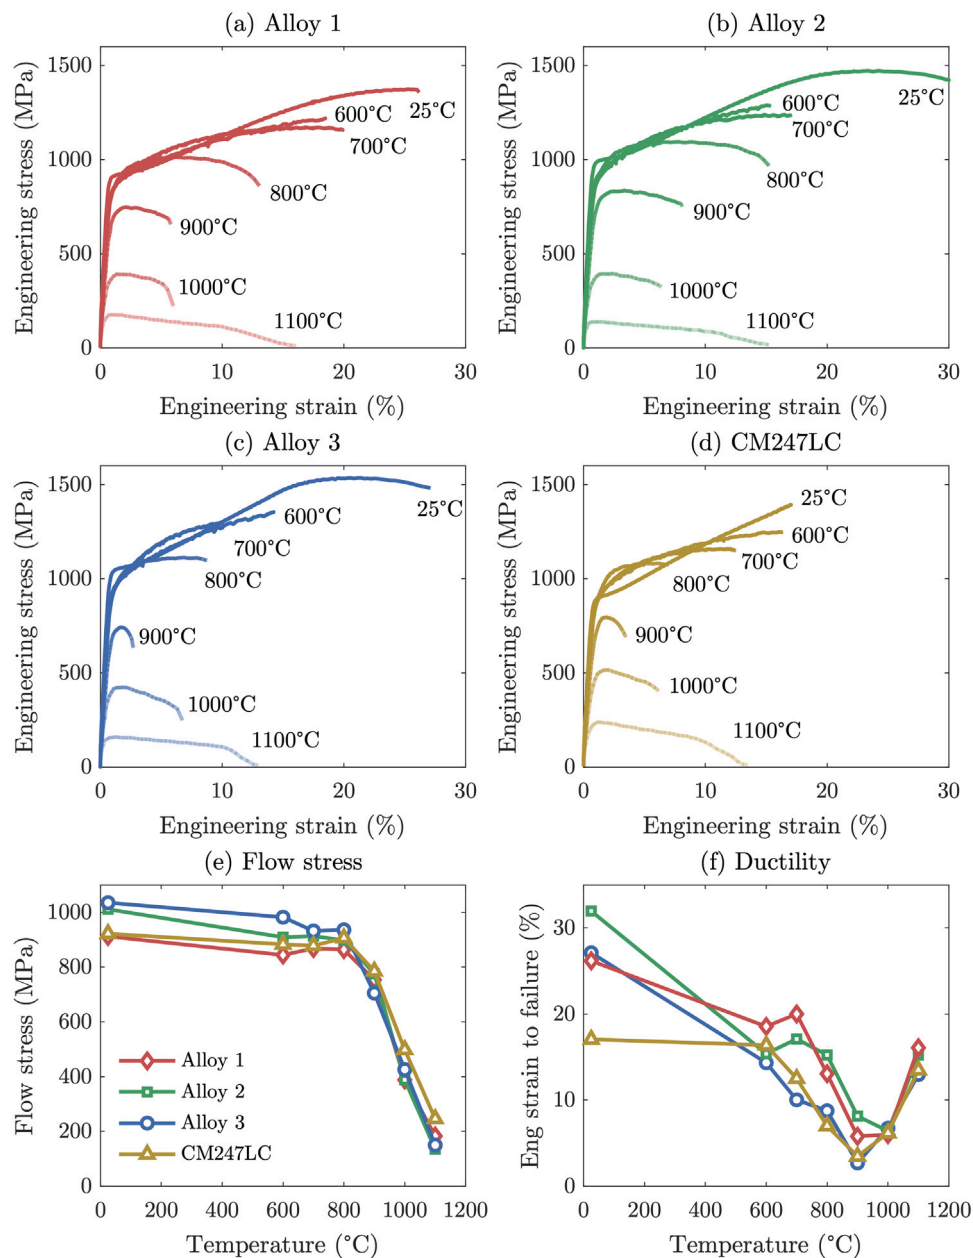


Fig. 5. Tensile response after HT3 for (a) Alloy 1 (b) Alloy 2 (c) Alloy 3 (d) CM247LC when strained at 10^{-2} s^{-1} and summary of their (e) flow stress vs. temperature and (f) engineering strain to failure vs. temperature.

forgiving compositions that are processable across a wide range of heat transfer conditions are required to account for geometric effects in actual engineering components.

3.2. On the influence of heat treatment and microstructure

The Ni-based superalloy microstructure following printing consisted of cellular dendrites with small or no secondary dendrite arms. The intercellular precipitation of Hf, Ta and Nb-rich MC carbides was observed consistent with Ref. [37,43]. Despite their substantial equilibrium γ' volume fractions, the novel alloy variants and CM247LC printed to γ , as observed on the lengthscale detectable by SEM. While it is possible that nm length scale γ' – not observable by SEM – precipitated by reheating from subsequent passes, these findings emphasize that heat treatment is needed in order to develop desirable mechanical properties.

The SEM micrographs in Fig. 3 show the microstructure developed in Alloy 2 following HT 1-3 and the microstructure of the four compositions considered in this work following HT 3. The γ' distribution of Alloy 2 was unimodal following HT 1 and bimodal following HT 3. The primary γ' observed in CM247LC following HT 3 was larger than in the new compositions.

Primary and secondary γ' was observed in all the alloys and APT analysis of Alloys 1 and 3 following HT 3 demonstrated the presence of tertiary γ' . APT confirmed the segregation of Ta, Nb, Al, and Ni to γ' . Conversely, Co, Cr, and Mo segregated to γ . No clear partitioning was observed for W. Crucially, the concentrations of Nb and Ta in the γ' of Alloy 3 were approximately 4 at.% and 2.5 at.% respectively, these were twice as high as those of Alloy 1. The macroscopic influence of this microscopic change is elucidated further sections.

When tensile tested at a strain rate of 10^{-3} s^{-1} Alloy 2 exhibited greater high temperature ductility and similar flow stress following the sub-solvus HT 2 – as compared to the super-solvus HT 1. When Alloy 2

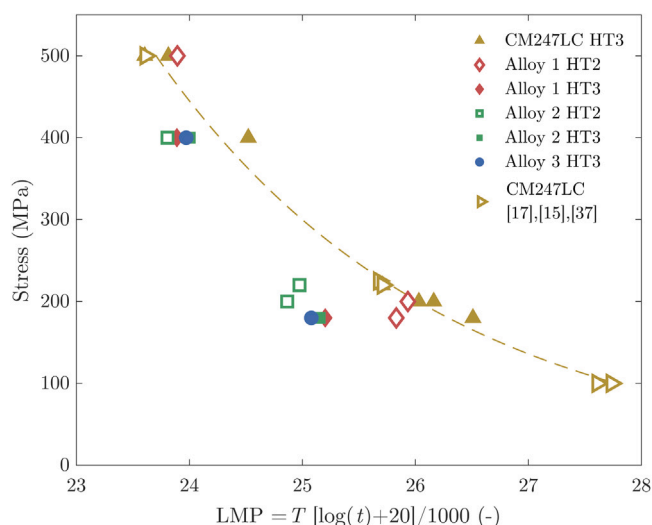


Fig. 6. Plot of the stress level vs. Larson–Miller parameter for the compositions creep tested with the build direction as the tensile axis with data from the literature [15,17,32] superimposed on the results of this study.

was heat treated in the super-solvus condition the material exhibited brittleness, accommodating only $\sim 1\%$ ductility when tested between $700\text{ }^{\circ}\text{C}$ – $1000\text{ }^{\circ}\text{C}$, see Fig. 4. The root cause of the embrittlement following HT 1 is discussed in Section 4. But here, it is sufficient to note for now that the flow stress of Alloy 2 at $800\text{ }^{\circ}\text{C}$ was 30 MPa greater when processed by HT 3 in contrast to HT 2. In light of this, as well as the 20 h reduction in processing time, HT 3 was used to process the alloys for comparison of their properties in all work that follows.

3.3. On the alloy properties developed following heat treatment 3 (HT3)

3.3.1. Flow behaviour

Fig. 5 contains the data showing the variation of flow stress and ductility as a function of temperature for the 4 compositions following HT3. Consistent with the observed Nb and Ta-rich γ' observed by APT, Alloy 3 exhibited the greatest flow stress of the 4 compositions up to $900\text{ }^{\circ}\text{C}$. Across the three novel alloy compositions, the flow stress increased with greater (Nb+Ta)/Al ratio. This occurred because Nb and Ta increases the energies of planar faults such as the anti-phase boundary (APB) and intrinsic/extrinsic stacking faults, which in turn inhibited γ' shearing [44]. Alloys 1 and 2 – with reduced Nb and Ta content – displayed a corresponding reduction in strength across the temperature range tested. The increased strength of Alloy 3 came with a corresponding reduction in ductility in the $700\text{ }^{\circ}\text{C}$ – $1100\text{ }^{\circ}\text{C}$ temperature regime. A ductility dip was observed in the 4 compositions at $1000\text{ }^{\circ}\text{C}$, which is also observed down to $800\text{ }^{\circ}\text{C}$ in Alloy 3 and CM247LC. At the higher temperatures of $1000\text{ }^{\circ}\text{C}$ and $1100\text{ }^{\circ}\text{C}$, CM247LC exhibited greater flow stress by $\sim 50\text{ MPa}$. These findings – based on testing at a rapid strain rate of 10^{-2} s^{-1} – do not account for the influence of any oxidation-assisted cracking [33]. Further investigation of the alloy properties taking into account the influence of oxidation-assisted cracking is carried out in the discussion section.

3.3.2. Creep resistance

Fig. 6 shows that the creep performance of CM247LC following HT3 exceeded that of the novel alloy variants across the range of temperatures and stresses tested by plotting the stress level vs. the Larson–Miller parameter (LMP). The factors conferring CM247LC with increased creep life relative to the novel alloy variants are likely (i) the greater γ' volume fraction [45,46] as well as (ii) the substantially

higher C and B contents [47–49]. Good agreement was observed between the creep performance of L-PBF produced CM247LC – tested parallel to the build direction – reported here and in the literature [15,17,32]. The superiority of CM247LC was reduced under conditions of higher stress and lower temperatures where APB shearing is the dominant deformation mechanism, as opposed to the low stress and high temperature conditions where dislocation climb bypass dominates [50,51].

The creep resistance of CM247LC was greater than that of the novel alloys despite the extensive cracking incurred during processing. This performance was maintained as a result of the directionality of the cracks, which were planar in form and parallel to the build direction as shown in Fig. 2. This meant the load state on the process induced cracks during the testing performed in this study was a combination of Mode II and Mode III, in-plane shear and out-of-plane shear respectively. If the tensile axis of the mechanical testing performed had instead been perpendicular to the build direction, the load state on the internal cracks of CM247LC would be Mode I – tensile stress normal to the crack plane – which would likely increase the detrimental effect of the processing induced defects [52].

3.4. Oxidation behaviour

A combination of TGA and post test characterization shown in Fig. 7 demonstrates that the (Nb+Ta)/Al ratio had a substantial influence on the oxidation behaviour. Alloy 1 had the greatest oxidation resistance on account of the stable continuous alumina layer formed. The total mass gain of the Alloy 1 specimen after 24 h was $\sim 60\%$ less than that of CM247LC and Alloy 3. This is consistent with its having the highest Al content of the 3 novel alloy variants and thus most preferential thermodynamics and kinetics for the formation of a stable and continuous Al_2O_3 layer. This is evidenced by TGA and in the BSE micrographs which show increasing mass gain and increasing discontinuity of the Al_2O_3 layers with decreasing Al content. In Alloy 3 discontinuities are observed every $\sim 5\text{ }\mu\text{m}$.

Characterization by EDX shed light on the nature of the scale formed in the novel alloy variants. The new compositions exhibited a thin outer Ni, Co, O rich oxide layer hypothesized to be $(\text{Ni}_{1-x}\text{Co}_x)\text{O}$, with a thicker Cr and O-rich Cr_2O_3 layer beneath, followed by a thin Nb, Ta-rich layer, Al_2O_3 , and AlN precipitates in the Al-depleted zone. While the overall combined oxide layer thicknesses of the 3 novel compositions were not statistically distinguishable, the Nb, Ta-rich layer was qualitatively observed to be thinner in Alloy 1 – the low Nb+Ta variant. AlN precipitated below sub-scale in Alloys 1–3 was due to N uptake during testing. After 24 h Alloys 1–3 all exhibited relatively continuous Al_2O_3 layers, suggesting that the N uptake of the material occurred early on before the Al_2O_3 layers was established.

Discontinuous NiO oxide formed on the outer surface of CM247LC, followed by spinel, Cr_2O_3 , Ti/W-rich oxides, and lastly HfO_2 which was found throughout the oxide layers, having large concentration in the innermost Al_2O_3 oxide layer in particular. The average sizes of the Al depletion zone in Alloy 1 and CM247LC ($2.9\text{ }\mu\text{m}$ and $3.3\text{ }\mu\text{m}$) were approximately half those of Alloy 3 and Alloy 2 ($5.9\text{ }\mu\text{m}$ and $6.2\text{ }\mu\text{m}$), the standard deviations ranged from $0.4\text{ }\mu\text{m}$ to $0.6\text{ }\mu\text{m}$. Despite its greater Al content, CM247LC is less resistant to oxidation than Alloys 1–3 within this relatively short test period. This is likely due to its greater Ti content, which has been shown to have a deleterious effect on the oxidation resistance [23,53].

4. Discussion

The above results indicate that the new alloy and its variants show substantially improved processability and comparable performance in comparison with CM247LC. However, key elements of these results warrant further analysis and are considered in what follows, namely, (i) the mechanism of super-solvus embrittlement, (ii) the resistance to oxidation-assisted cracking which is assuming greater and greater importance in industrial requirements, and (iii) the implications of the influence of the (Nb+Ta)/Al ratio on alloy design.

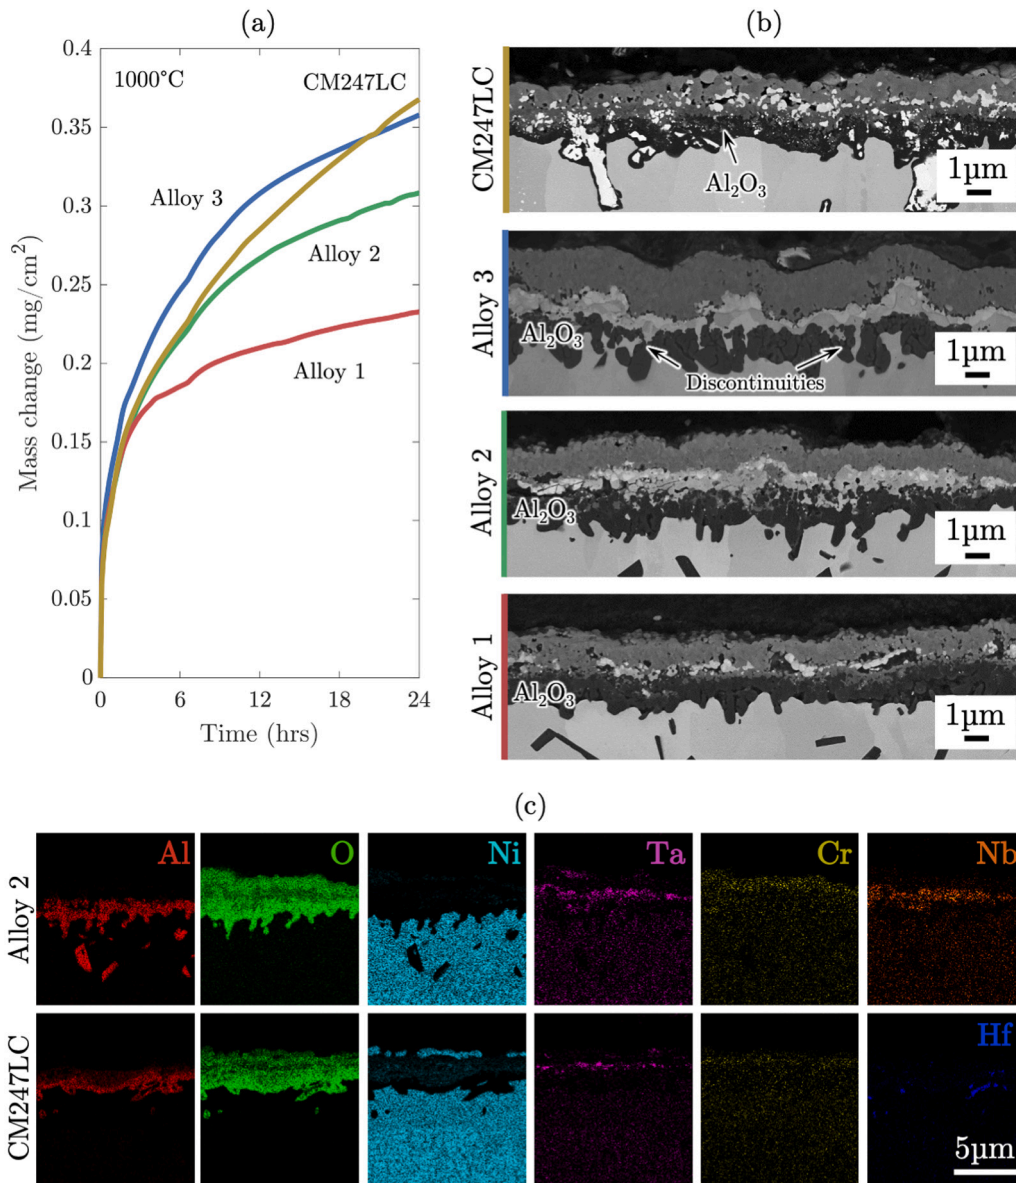


Fig. 7. (a) Mass change vs. time during isothermal thermo-gravimetric testing at 1000 °C. (b) BSE micrographs of the oxide developed on each composition following testing. (c) EDX maps showing the distributions of elements in the oxide layers formed on Alloy 2 and CM247LC.

4.1. On the mechanism of super-solvus ductility loss at elevated temperatures

The phenomenon of ductility loss after recrystallization is also observed in other superalloys made by additive manufacturing especially at elevated temperatures [54,55]. This is considered to be attributed to a combination of microstructural changes, particularly the alteration in crystallographic texture and local grain boundary microstructure.

For the super-solvus case, recrystallization was observed throughout the microstructure with notable grain growth. The inverse pole figure maps in Fig. 8(a & b) were viewed along the Z-axis, which is parallel to the build direction. A predominant red colour in the sub-solvus condition is indicative of a strong texture along the {0 0 1} orientation, this becomes weaker after recrystallization in the super-solvus case — the texture has been reduced markedly. Similar results were also reported in other superalloys [56,57], which is triggered by the initial high dislocation density of the as-printed microstructure [16]. Studies by Deng et al. [58] and Gokcekaya et al. [59] corroborate the texture effect on the mechanical properties, where ductility along the {0 0

1} is greater compared to loading from other orientations. Fig. 8(c & d) illustrates the differences between the grain structures and carbide distributions after super and sub-solvus heat treatment. The size of the carbides are notably larger in the super-solvus case and are frequently observed in the grain boundaries. These intergranular carbides have been shown to have a deleterious effect on ductility due to decohesion of the carbide-matrix interface [60,61]. Furthermore, the size of the γ' phase in the vicinity of the grain boundaries also varied following the different heat treatment, see Fig. 8(e & f). After the sub-solvus heat treatment the grain boundaries were decorated with some large and many fine γ' precipitates. This arises since γ' formers segregate to grain and cell boundaries during the printing process [16], and promote the initial γ' precipitation when heated to 1080 °C. These then coarsen during the isothermal holding which is followed by the nucleation of the fine γ' during cooling. The precipitation of γ' at the grain boundary during sub-solvus heat treatment and its subsequent preservation of ductility has been previously reported [62]. The distribution of γ' in the grain interior following super and sub-solvus heat treatments are quantitatively indistinguishable. As such, the texture and local grain boundary microstructure, such as carbide and γ' distribution,

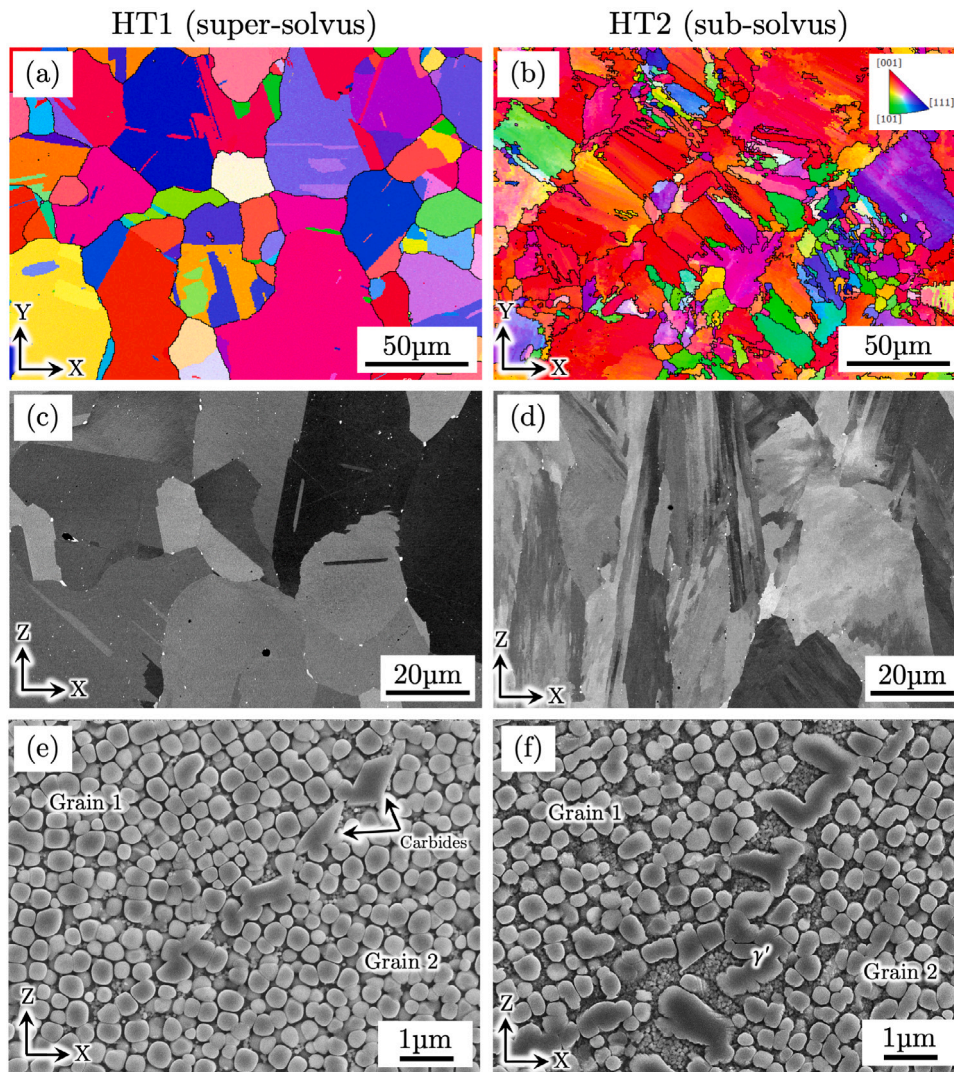


Fig. 8. Microstructural analysis illustrating the cause of the super-solvus embrittlement of Alloy 2. For super-solvus and sub-solvus respectively showing (a–b) EBSD inverse pole figure along the z-axis on the XY plane (c–d) BSE micrographs on the XZ plane (e–f) SE micrographs of the grain boundary microstructures on the XZ plane (where γ matrix has been etched away). (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

are considered the key factors causing the embrittlement incurred in recrystallized Alloy 2 following super-solvus heat treatment.

4.2. On the resistance to oxidation-assisted cracking (OAC)

Alloy 3 exhibits the highest strength and Alloy 1 demonstrates the superior oxidation resistance, but the question is now asked; which is more desirable given the effect of oxidation on tensile properties? After all, it has been shown in the literature that superalloys strained at slow rates for longer periods of time exhibit oxidation at crack tips [33]; this accelerates crack propagation and substantially deteriorates the material properties and is of particular interest under dwell fatigue crack propagation conditions [63]. When deformed at a rate of 10^{-5} s^{-1} the alloys fracture after ~ 2 h. Each alloy exhibits a loss of approximately half their strength and ductility when deformed at this slower rate, see Fig. 9. This is consistent with the effects of oxidation as reported in the literature [64,65].

Alloy 2 displayed the most resistance to oxidation-assisted cracking, having the greatest flow stress ~ 705 MPa and ductility $\sim 8\%$ under uniaxial tension at a strain rate of 10^{-5} s^{-1} . Neither the most oxidation resistant high Al variant or the strongest – high Nb+Ta variant – performed as well as Alloy 2 under these conditions. Thus, it appears the moderate ratio (Nb+Ta)/Al was most effective, with sufficient Nb

and Ta to increase the γ' APB energy for strength as well as the Al to have oxidation resistance. The measured flow stress of CM247LC under a strain rate of 10^{-2} s^{-1} was ~ 900 MPa, which dropped to ~ 610 MPa at 10^{-5} s^{-1} given the contribution of oxidation. It is noted that the processing induced defects in CM247LC may have contributed to the decrease in properties at slower strain rate.

These findings highlight that despite initial tensile tests showing that the strategy of designing stronger alloys by substituting Al in γ' for Nb and Ta, a more holistic perspective indicates that maintaining sufficient Al content is vital. Overall, a balance of (Nb+Ta)/Al ratio must be struck to mitigate oxidation-assisted cracking.

4.3. Composition-processing-performance trade-offs

Here, five metrics are considered to summarize the performance trade-offs when the (Nb+Ta)/Al ratio is varied: strength, creep resistance, oxidation resistance, OAC resistance, and affordability. Maximizing each metric is ideal, the metrics are defined as follows; strength: the flow stress at 800°C (MPa), affordability: the reciprocal of cost (kg/\$), creep resistance: the LMP at 180 MPa, oxidation resistance: reciprocal of mass gain during isothermal oxidation, OAC resistance: the flow stress at 800°C when strained at 10^{-5} s^{-1} . The metric values for the 3 alloy variants are summarized in Table 3. Fig. 10 summarizes

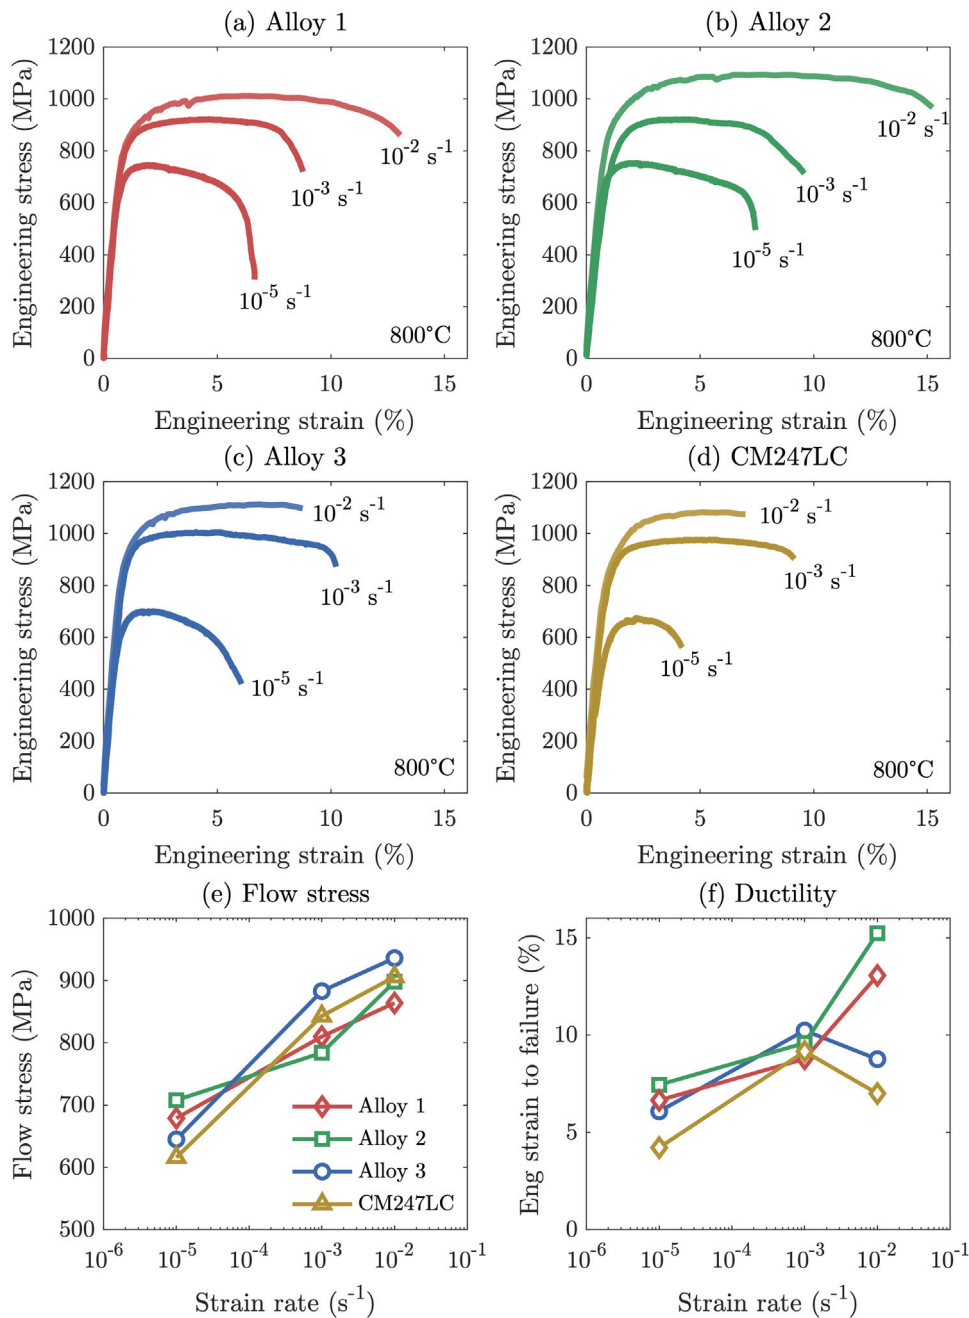


Fig. 9. Strain rate dependence of the tensile response after HT3 for (a) Alloy 1 (b) Alloy 2 (c) Alloy 3 and (d) CM247LC illustrating their susceptibility to oxidation-assisted cracking at 800 °C. Summary of the strain rate sensitivity of (e) the flow stress and (f) the ductility.

the trade-offs of these metrics in spider plots, the scaling of relative metrics is linear. Contrasting Alloy 1 and Alloy 3 shows that achieving the same γ' fraction through additions of either Al or Nb+Ta yields oxidation resistance or strength respectively. Given the Al is more readily available than Nb or Ta, the strength of Alloy 3 also comes with greater cost. Alloy 2 maintains a balance of strength and oxidation resistance and in doing so achieves good resistance to oxidation-assisted cracking relative to Alloy 1 and Alloy 3.

Direct comparison of CM247LC with the new compositions must be done, taking into account the application. The superior creep performance of CM247LC, which is attributed to its more elevated solid solution and interstitial content inhibiting the mobility of dislocations through the γ channels comes at the price of processability, as the C and B content makes it susceptible to cracking [49]. While it does retain superior creep properties despite the cracking it incurred during

processing, these cracks may make it unsuitable on account of their deleterious effects for fatigue crack growth rate. In the mid-temperature regime – where the shearing of γ' is the dominant deformation mechanism – the novel compositions marginally exceed the performance of CM247LC. However, it is noted the heat treatment conditions applied in this work were selected on the basis of the γ' solvus temperatures of the new alloy variants and not CM247LC, and that there may be scope to optimize the heat treatment of CM247LC processed by AM [56].

The strength and oxidation resistance as well as the processability and creep trade-offs highlighted here offer valuable insights into alloy design. Single objective amplification of any given material property at the expense of others may have unforeseen ramifications. Hence, design must be undertaken with all the failure and damage mechanisms in mind, going past isothermal creep testing to assess alloy performance

Table 3
Spider plot performance values.

Alloy	Strength (MPa)	Creep resistance (LMP)	Oxidation resistance (24 h/cm ² /mg)	Affordability (kg/\$)	OAC resistance (MPa)
Alloy 1	864	25.20	4.3	3.37	679
Alloy 2	898	25.15	3.3	3.17	708
Alloy 3	936	25.08	2.9	3.0	645

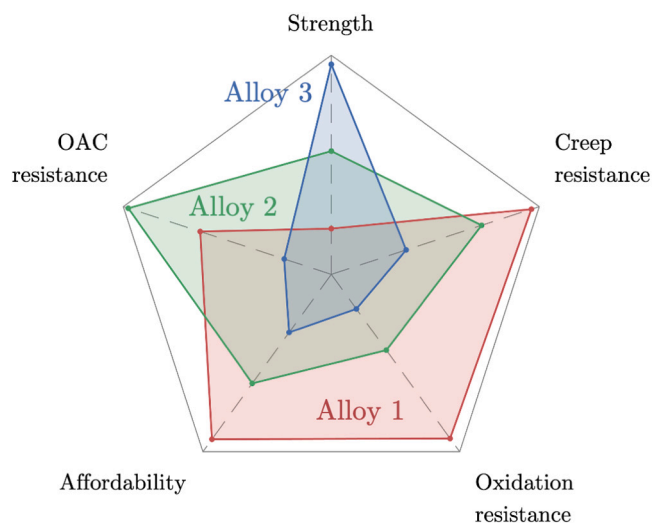


Fig. 10. Spider plots summarizing the alloy design trade-offs with varying (Nb+Ta)/Al ratio.

under conditions such as thermal–mechanical fatigue and dwell fatigue where oxidation-assisted cracking plays a role.

5. Summary and conclusions

In this body of work, the processability and performance of three variants of a novel alumina-forming Ni-based superalloy have been assessed and contrasted with the heritage alloy CM247LC. The following specific conclusions have been drawn:

1. The new grade of superalloy in its three (Nb+Ta)/Al variants is shown to be processable; processing-related cracking has not been detected by either optical microscopy coupled with stereology or else high resolution X-ray computed tomography. Conversely, the benchmark CM247LC alloy exhibited extensive cracking following L-PBF.
2. The response of the as-printed material to heat treatment is critically important. Sub-solvus heat treatment is effective for the maintenance of ductility and strength, due to a fine decoration of γ' at the grain boundaries. Heat treatment conditions absent solutionizing need to be chosen carefully — super-solvus heat treatment causes embrittlement due to the texture of the recrystallized grain structure and the local microstructure of the grain boundaries which then consist of γ' and coarse blocky carbides.
3. Oxidation testing using thermal gravimetric analysis (TGA) and subsequent microstructural characterization have confirmed that the new alloys form a protective layer of alumina.
4. Increasing the (Nb+Ta)/Al ratio at a fixed γ' fraction increases the yield stress of the alloy by increasing the Nb and Ta content in γ' , consistent with enhanced energies of planar faults. However, this comes at the expense of the alloy cost, oxidation — and lastly — the oxidation-assisted cracking resistance — which is of increasing importance for the intended applications. It is highlighted that this ratio can be tailored to match the application of the alloy.

5. This work serves as guidance for future alloy design and demonstrates that it is possible to identify compositions of superior yield stress, oxidation resistance, and oxidation-assisted cracking resistance which are nonetheless processable.

CRediT authorship contribution statement

Joseph N. Ghoussoub: Writing – review & editing, Writing – original draft, Formal analysis, Data curation, Conceptualization. **Przemysław Klupś:** Formal analysis, Data curation. **William J.B. Dick-Cleland:** Project administration, Conceptualization. **Kathryn E. Rankin:** Writing – review & editing, Methodology, Formal analysis. **Satoshi Utada:** Writing – review & editing, Conceptualization. **Paul A.J. Bagot:** Resources. **D. Graham McCartney:** Writing – review & editing. **Yuanbo T. Tang:** Writing – review & editing, Supervision, Formal analysis. **Roger C. Reed:** Writing – review & editing, Supervision, Funding acquisition.

Declaration of competing interest

One or more of the authors of this paper have disclosed potential or pertinent conflicts of interest, which may include receipt of payment, either direct or indirect, institutional support, or association with an entity in the biomedical field which may be perceived to have potential conflict of interest with this work. For full disclosure statements refer to <https://doi.org/10.1016/j.addma.2022.102608>. Alloyed Ltd (formerly OxMet Technologies) is a spin-out company of the University of Oxford, and one of the authors of this manuscript works for this organization, as listed in the affiliations given on the first page of the paper. Prof. Reed maintains a small (<5%) shareholding in this company.

Acknowledgements

The financial support of this work by Alloyed Ltd. as well as The Natural Sciences and Engineering Research Council of Canada (NSERC) in the Chemical, Biomedical and Materials Science Engineering division award number 532410. The authors acknowledge funding from Innovate UK, under project number 104047, specifically the Materials and Manufacturing Division, as well as funding for the National X-ray Computed Tomography (NXCT) grant code EP/T02593X/1 from the Engineering and Physical Sciences Research Council (EPSRC), United Kingdom. The authors acknowledge Prof. Ian Sinclair, Dr. David Cruden, Dr. André Németh and Dr. Matthew Fawkes for their support and advisory roles regarding this body of work.

References

- [1] B. Blakey-Milner, P. Gradl, G. Snedden, M. Brooks, J. Pitot, E. Lopez, M. Leary, F. Berto, A. du Plessis, Metal additive manufacturing in aerospace: A review, *Mater. Des.* (2021) 110008, <http://dx.doi.org/10.1016/j.matdes.2021.110008>.
- [2] D. Herzog, V. Seyda, E. Wycisk, C. Emmelmann, Additive manufacturing of metals, *Acta Mater.* 117 (2016) 371–392, <http://dx.doi.org/10.1016/j.actamat.2016.07.019>.
- [3] C. Panwisawas, Y.T. Tang, R.C. Reed, Metal 3D printing as a disruptive technology for superalloys, *Nature Commun.* 11 (1) (2020) 1–4, <http://dx.doi.org/10.1038/s41467-020-16188-7>.
- [4] A.A. Martin, N.P. Calta, S.A. Khairallah, J. Wang, P.J. Depond, A.Y. Fong, V. Thampy, G.M. Guss, A.M. Kiss, K.H. Stone, et al., Dynamics of pore formation during laser powder bed fusion additive manufacturing, *Nature Commun.* 10 (1) (2019) 1–10, <http://dx.doi.org/10.1038/s41467-019-10009-2>.

- [5] E. Chauvet, P. Kontis, E.A. Jägler, B. Gault, D. Raabe, C. Tassin, J.-J. Blandin, R. Dendiev, B. Vayre, S. Abed, et al., Hot cracking mechanism affecting a non-weldable Ni-based superalloy produced by selective electron beam melting, *Acta Mater.* 142 (2018) 82–94, <http://dx.doi.org/10.1016/j.actamat.2017.09.047>.
- [6] D. Qian, J. Xue, A. Zhang, Y. Li, N. Tamura, Z. Song, K. Chen, Statistical study of ductility-dip cracking induced plastic deformation in polycrystalline laser 3D printed Ni-based superalloy, *Sci. Rep.* 7 (1) (2017) 1–9, <http://dx.doi.org/10.1038/s41598-017-03051-x>.
- [7] S. Pattnaik, D.B. Karunakar, P. Jha, Developments in investment casting process—a review, *J. Mater. Process. Technol.* 212 (11) (2012) 2332–2348, <http://dx.doi.org/10.1016/j.jmatprotec.2012.06.003>.
- [8] M.E. Orme, M. Gschweilt, M. Ferrari, I. Madera, F. Mouriaux, Designing for additive manufacturing: lightweighting through topology optimization enables lunar spacecraft, *J. Mech. Des.* 139 (10) (2017) 100905, <http://dx.doi.org/10.1115/1.4037304>.
- [9] D. Ramirez, L. Murr, E. Martinez, D. Hernandez, J. Martinez, B.I. Machado, F. Medina, P. Frigola, R. Wicker, Novel precipitate–microstructural architecture developed in the fabrication of solid copper components by additive manufacturing using electron beam melting, *Acta Mater.* 59 (10) (2011) 4088–4099, <http://dx.doi.org/10.1016/j.actamat.2011.03.033>.
- [10] S. Sanchez, C. Hyde, I. Ashcroft, G. Ravi, A. Clare, Multi-laser scan strategies for enhancing creep performance in LPBF, *Addit. Manuf.* 41 (2021) 101948, <http://dx.doi.org/10.1016/j.addma.2021.101948>.
- [11] D. Grange, J. Bartout, B. Macquaire, C. Colin, Processing a non-weldable nickel-base superalloy by selective laser melting: role of the shape and size of the melt pools on solidification cracking, *Mater.* 12 (2020) 100686, <http://dx.doi.org/10.1016/j.mtla.2020.100686>.
- [12] S.S. Babu, N. Raghavan, J. Raplee, S.J. Foster, C. Frederick, M. Haines, R. Dinwiddie, M. Kirka, A. Plotkowski, Y. Lee, et al., Additive manufacturing of nickel superalloys: opportunities for innovation and challenges related to qualification, *Metall. Mater. Trans. A* 49 (9) (2018) 3764–3780, <http://dx.doi.org/10.1007/s11661-018-4702-4>.
- [13] T. Pollock, A. Clarke, S. Babu, Design and tailoring of alloys for additive manufacturing, *Metall. Mater. Trans. A* 51 (12) (2020) 6000–6019, <http://dx.doi.org/10.1007/s11661-020-06009-3>.
- [14] S.P. Murray, K.M. Pusch, A.T. Polonsky, C.J. Torbet, G.G. Seward, N. Zhou, S.A. Forsik, P. Nandwana, M.M. Kirka, R.R. Dehoff, et al., A defect-resistant Co–Ni superalloy for 3D printing, *Nature Commun.* 11 (1) (2020) 1–11, <http://dx.doi.org/10.1038/s41467-020-18775-0>.
- [15] Y.T. Tang, C. Panwisawas, J.N. Ghossoub, Y. Gong, J.W. Clark, A.A. Németh, D.G. McCartney, R.C. Reed, Alloys-by-design: Application to new superalloys for additive manufacturing, *Acta Mater.* 202 (2021) 417–436, <http://dx.doi.org/10.1016/j.actamat.2020.09.023>.
- [16] Y.T. Tang, J.N. Ghossoub, C. Panwisawas, D.M. Collins, S. Amirkanlou, J.W. Clark, A.A. Németh, D.G. McCartney, R.C. Reed, The effect of heat treatment on tensile yielding response of the new superalloy ABD-900AM for additive manufacturing, in: *Superalloys 2020*, Springer, 2020, pp. 1055–1065, <http://dx.doi.org/10.1007/978-3-030-51834-9>.
- [17] N. Zhou, A.D. Dicus, S.A. Forsik, T. Wang, G.A. Colombo, M.E. Epler, Development of a new alumina-forming crack-resistant high γ' fraction Ni-base superalloy for additive manufacturing, in: *Superalloys 2020*, Springer, 2020, pp. 1046–1054, <http://dx.doi.org/10.1007/978-3-030-51834-9>.
- [18] J. Xu, H. Gruber, R. Lin Peng, J. Moverare, A novel γ' -strengthened nickel-based superalloy for laser powder bed fusion, *Materials* 13 (21) (2020) 4930, <http://dx.doi.org/10.3390/ma13214930>.
- [19] B. Jönsson, A. Westerlund, Oxidation comparison of alumina-forming and chromia-forming commercial alloys at 1100 and 1200 C, *Oxid. Met.* 88 (3) (2017) 315–326, <http://dx.doi.org/10.1007/s11085-016-9710-4>.
- [20] B.A. Pint, K. Unocic, S. Dryepondt, E. Ott, J. Groh, A. Banik, I. Dempster, T. Gabb, R. Helmink, X. Liu, et al., Oxidation of superalloys in extreme environments, in: *7th International Symposium on Superalloy 718 and Derivatives*, TMS-AIME, Warrendale, PA, 2010, pp. 861–875.
- [21] D.J. Crudden, B. Raesinia, N. Warnken, R.C. Reed, Analysis of the chemistry of Ni-base turbine disk superalloys using an alloys-by-design modeling approach, *Metall. Mater. Trans. A* 44 (5) (2013) 2418–2430, <http://dx.doi.org/10.1007/s11661-012-1569-7>.
- [22] R.C. Reed, T. Tao, N. Warnken, Alloys-by-design: application to nickel-based single crystal superalloys, *Acta Mater.* 57 (19) (2009) 5898–5913, <http://dx.doi.org/10.1016/j.actamat.2009.08.018>.
- [23] A.A. Németh, D.J. Crudden, D.M. Collins, V. Kuksenko, C. Liebscher, D.E. Armstrong, A.J. Wilkinson, R.C. Reed, On the influence of Nb/Ti ratio on environmentally-assisted crack growth in high-strength nickel-based superalloys, *Metall. Mater. Trans. A* 49 (9) (2018) 3923–3937, <http://dx.doi.org/10.1007/s11661-018-4619-y>.
- [24] Crudden David (GB) and Clark John William Gordon (GB) and Nemeth Andre (GB), *A nickel-based alloy*, 2020.
- [25] R.C. Reed, A. Mottura, D.J. Crudden, Alloys-by-design: Towards optimization of compositions of nickel-based superalloys, in: *Superalloys 2016: Proceedings of the 13th International Symposium of Superalloys*, Wiley Online Library, 2016, pp. 13–23, <http://dx.doi.org/10.1002/9781119075646.ch2>.
- [26] J.-O. Andersson, T. Helander, L. Höglund, P. Shi, B. Sundman, Thermo-Calc & DICTRA, computational tools for materials science, *CALPHAD* 26 (2) (2002) 273–312, [http://dx.doi.org/10.1016/S0364-5916\(02\)00037-8](http://dx.doi.org/10.1016/S0364-5916(02)00037-8).
- [27] J.N. Ghossoub, Y.T. Tang, C. Panwisawas, A. Németh, R.C. Reed, On the influence of alloy chemistry and processing conditions on additive manufacturability of Ni-based superalloys, in: *Superalloys 2020 Proceedings*, Springer, 2020, pp. 153–162, <http://dx.doi.org/10.1007/978-3-030-51834-9>.
- [28] M.D. Abrámoff, P.J. Magalhães, S.J. Ram, *Image processing with ImageJ*, *Biophotonics Int.* 11 (7) (2004) 36–42.
- [29] A.J. London, Quantifying uncertainty from mass-peak overlaps in atom probe microscopy, *Microsc. Microanal.* 25 (2) (2019) 378–388, <http://dx.doi.org/10.1017/S1431927618016276>.
- [30] L. Chapman, Application of high temperature DSC technique to nickel based superalloys, *J. Mater. Sci.* 39 (24) (2004) 7229–7236, <http://dx.doi.org/10.1023/B:JMSC.0000048736.86794.12>.
- [31] P. Quested, R. Brooks, L. Chapman, R. Morrell, Y. Youssef, K. Mills, Measurement and estimation of thermophysical properties of nickel based superalloys, *Mater. Sci. Technol.* 25 (2) (2009) 154–162, <http://dx.doi.org/10.1179/174328408X361454>.
- [32] L.N. Carter, *Selective Laser Melting of Nickel Superalloys for High Temperature Applications* (Ph.D. thesis), University of Birmingham, 2013.
- [33] A. Németh, D. Crudden, D. Armstrong, D. Collins, K. Li, A. Wilkinson, C. Grovenor, R. Reed, Environmentally-assisted grain boundary attack as a mechanism of embrittlement in a nickel-based superalloy, *Acta Mater.* 126 (2017) 361–371, <http://dx.doi.org/10.1016/j.actamat.2016.12.039>.
- [34] H. Li, J. Sun, M. Hardy, H. Evans, S. Williams, T. Doel, P. Bowen, Effects of microstructure on high temperature dwell fatigue crack growth in a coarse grain PM nickel based superalloy, *Acta Mater.* 90 (2015) 355–369, <http://dx.doi.org/10.1016/j.actamat.2015.02.023>.
- [35] J.N. Ghossoub, Y.T. Tang, W.J.B. Dick-Cleland, A.A. Németh, Y. Gong, D.G. McCartney, A.C. Cocks, R.C. Reed, On the influence of alloy composition on the additive manufacturability of Ni-based superalloys, *Metall. Mater. Trans. A* (2022) <http://dx.doi.org/10.1007/s11661-021-06568-z>.
- [36] C. Panwisawas, B. Perumal, R.M. Ward, N. Turner, R.P. Turner, J.W. Brooks, H.C. Basoalto, Keyhole formation and thermal fluid flow-induced porosity during laser fusion welding in titanium alloys: Experimental and modelling, *Acta Mater.* 126 (2017) 251–263, <http://dx.doi.org/10.1016/j.actamat.2016.12.062>.
- [37] X. Wang, L.N. Carter, B. Pang, M.M. Attallah, M.H. Loretto, Microstructure and yield strength of SLM-fabricated CM247LC Ni-Superalloy, *Acta Mater.* 128 (2017) 87–95, <http://dx.doi.org/10.1016/j.actamat.2017.02.007>.
- [38] A. Hariharan, L. Lu, J. Risse, A. Kostka, B. Gault, E.A. Jägler, D. Raabe, Misorientation-dependent solute enrichment at interfaces and its contribution to defect formation mechanisms during laser additive manufacturing of superalloys, *Phys. Rev. Mater.* 3 (12) (2019) 123602, <http://dx.doi.org/10.1103/PhysRevMaterials.3.123602>.
- [39] S.A. Khairallah, A.T. Anderson, A. Rubenchik, W.E. King, Laser powder-bed fusion additive manufacturing: Physics of complex melt flow and formation mechanisms of pores, spatter, and denudation zones, *Acta Mater.* 108 (2016) 36–45, <http://dx.doi.org/10.1016/j.actamat.2016.02.014>.
- [40] K. Moussaoui, W. Rubio, M. Mousseigne, T. Sultan, F. Rezaei, Effects of selective laser melting additive manufacturing parameters of Inconel 718 on porosity, microstructure and mechanical properties, *Mater. Sci. Eng. A* 735 (2018) 182–190, <http://dx.doi.org/10.1016/j.msea.2018.08.037>.
- [41] S. Catchpole-Smith, N. Aboulkhair, L. Parry, C. Tuck, I. Ashcroft, A. Clare, Fractal scan strategies for selective laser melting of ‘unweldable’ nickel superalloys, *Addit. Manuf.* 15 (2017) 113–122, <http://dx.doi.org/10.1016/j.addma.2017.02.002>.
- [42] R. Comminal, M.P. Serdeczny, D.B. Pedersen, J. Spangenberg, Motion planning and numerical simulation of material deposition at corners in extrusion additive manufacturing, *Addit. Manuf.* 29 (2019) 100753, <http://dx.doi.org/10.1016/j.addma.2019.06.005>.
- [43] V. Divya, R. Muñoz Moreno, O. Messé, J. Barnard, S. Baker, T. Illston, H. Stone, Microstructure of selective laser melted CM247LC nickel-based superalloy and its evolution through heat treatment, *Mater. Charact.* 114 (2016) 62–74, <http://dx.doi.org/10.1016/j.matchar.2016.02.004>.
- [44] D. Crudden, A. Mottura, N. Warnken, B. Raesinia, R. Reed, Modelling of the influence of alloy composition on flow stress in high-strength nickel-based superalloys, *Acta Mater.* 75 (2014) 356–370, <http://dx.doi.org/10.1016/j.actamat.2014.04.075>.
- [45] T. Murakumo, T. Kobayashi, Y. Koizumi, H. Harada, Creep behaviour of Ni-base single-crystal superalloys with various γ' volume fraction, *Acta Mater.* 52 (12) (2004) 3737–3744, <http://dx.doi.org/10.1016/j.actamat.2004.04.028>.
- [46] Z. Zhu, H. Basoalto, N. Warnken, R. Reed, A model for the creep deformation behaviour of nickel-based single crystal superalloys, *Acta Mater.* 60 (12) (2012) 4888–4900, <http://dx.doi.org/10.1016/j.actamat.2012.05.023>.
- [47] P. Kontis, H.M. Yusof, S. Pedrazzini, M. Danaie, K. Moore, P. Bagot, M. Moody, C. Grovenor, R. Reed, On the effect of boron on grain boundary character in a new polycrystalline superalloy, *Acta Mater.* 103 (2016) 688–699, <http://dx.doi.org/10.1016/j.actamat.2015.10.006>.

- [48] P. Kontis, E. Alabort, D. Barba, D.M. Collins, A.J. Wilkinson, R.C. Reed, On the role of boron on improving ductility in a new polycrystalline superalloy, *Acta Mater.* 124 (2017) 489–500, <http://dx.doi.org/10.1016/j.actamat.2016.11.009>.
- [49] A. Després, S. Antonov, C. Mayer, C. Tassin, M. Veron, J.-J. Blandin, P. Kontis, G. Martin, On the role of boron, carbon and zirconium on hot cracking and creep resistance of an additively manufactured polycrystalline superalloy, *Materialia* 19 (2021) 101193, <http://dx.doi.org/10.1016/j.mta.2021.101193>.
- [50] T.M. Smith, R.R. Unocic, H. Deutchman, M.J. Mills, Creep deformation mechanism mapping in nickel base disk superalloys, *Mater. High Temp.* 33 (4–5) (2016) 372–383, <http://dx.doi.org/10.1080/09603409.2016.1180858>.
- [51] D. Barba, E. Alabort, S. Pedrazzini, D. Collins, A. Wilkinson, P. Bagot, M. Moody, C. Atkinson, A. Jérusalem, R. Reed, On the microtwinning mechanism in a single crystal superalloy, *Acta Mater.* 135 (2017) 314–329, <http://dx.doi.org/10.1016/j.actamat.2017.05.072>.
- [52] Q. Han, Y. Gu, S. Soe, F. Lacan, R. Setchi, Effect of hot cracking on the mechanical properties of Hastelloy X superalloy fabricated by laser powder bed fusion additive manufacturing, *Opt. Laser Technol.* 124 (2020) 105984, <http://dx.doi.org/10.1016/j.optlastec.2019.105984>.
- [53] H.-S. Kim, S.-J. Park, S.-M. Seo, Y.-S. Yoo, H.-W. Jeong, H. Jang, Regression analysis of high-temperature oxidation of Ni-based superalloys using artificial neural network, *Corros. Sci.* 180 (2021) 109207, <http://dx.doi.org/10.1016/j.corsci.2020.109207>.
- [54] S.P. Murray, *CoPNI-PBase Superalloys with Improved High Temperature Properties and 3D Printability* (Ph.D. thesis), University of California, Santa Barbara, 2021.
- [55] J. Xu, *Alloy Design and Characterization of γ' Strengthened Nickel-based Superalloys for Additive Manufacturing* (Ph.D. thesis), Linköping University Electronic Press, 2021.
- [56] R. Muñoz Moreno, V. Divya, S. Driver, O. Messé, T. Illston, S. Baker, M. Carpenter, H. Stone, Effect of heat treatment on the microstructure, texture and elastic anisotropy of the nickel-based superalloy CM247LC processed by selective laser melting, *Mater. Sci. Eng. A* 674 (2016) 529–539, <http://dx.doi.org/10.1016/j.msea.2016.06.075>.
- [57] N. Kouraytem, J. Varga, B. Amin-Ahmadi, H. Mirmohammad, R.A. Chanut, A.D. Spear, O.T. Kingstedt, A recrystallization heat-treatment to reduce deformation anisotropy of additively manufactured Inconel 718, *Mater. Des.* 198 (2021) 109228, <http://dx.doi.org/10.1016/j.matdes.2020.109228>.
- [58] D. Deng, R.L. Peng, H. Brodin, J. Moverare, Microstructure and mechanical properties of Inconel 718 produced by selective laser melting: Sample orientation dependence and effects of post heat treatments, *Mater. Sci. Eng. A* 713 (2018) 294–306, <http://dx.doi.org/10.1016/j.msea.2017.12.043>.
- [59] O. Gokcekaya, T. Ishimoto, S. Hibino, J. Yasutomi, T. Narushima, T. Nakano, Unique crystallographic texture formation in Inconel 718 by laser powder bed fusion and its effect on mechanical anisotropy, *Acta Mater.* 212 (2021) 116876, <http://dx.doi.org/10.1016/j.actamat.2021.116876>.
- [60] L. He, Q. Zheng, X. Sun, H. Guan, Z. Hu, A. Tieu, C. Lu, H. Zhu, Effect of carbides on the creep properties of a Ni-base superalloy M963, *Mater. Sci. Eng. A* 397 (1–2) (2005) 297–304, <http://dx.doi.org/10.1016/j.msea.2005.02.038>.
- [61] G.-x. Yang, Y.-f. Xu, L. Jiang, S.-h. Liang, High temperature tensile properties and fracture behavior of cast nickel-base K445 superalloy, *Prog. Nat. Sci.* 21 (5) (2011) 418–425, [http://dx.doi.org/10.1016/S1002-0071\(12\)60078-1](http://dx.doi.org/10.1016/S1002-0071(12)60078-1).
- [62] C. Joseph, C. Persson, M.H. Colliander, Influence of heat treatment on the microstructure and tensile properties of Ni-base superalloy Haynes 282, *Mater. Sci. Eng. A* 679 (2017) 520–530, <http://dx.doi.org/10.1016/j.msea.2016.10.048>.
- [63] L. Viskari, M. Hörnqvist, K. Moore, Y. Cao, K. Stiller, Intergranular crack tip oxidation in a Ni-base superalloy, *Acta Mater.* 61 (10) (2013) 3630–3639, <http://dx.doi.org/10.1016/j.actamat.2013.02.050>.
- [64] A. Evans, M. He, A. Suzuki, M. Gigliotti, B. Hazel, T. Pollock, A mechanism governing oxidation-assisted low-cycle fatigue of superalloys, *Acta Mater.* 57 (10) (2009) 2969–2983, <http://dx.doi.org/10.1016/j.actamat.2009.02.047>.
- [65] M. Lafata, L. Rettberg, M. He, T. Pollock, Oxidation-assisted crack growth in single-crystal superalloys during fatigue with compressive holds, *Metall. Trans. A* 49 (1) (2018) 105–116, <http://dx.doi.org/10.1007/s11661-017-4392-3>.